

Gas Thyatron

TETRODE TYPE

For Relay and Grid-Controlled-Rectifier Service

GENERAL DATA

Electrical:

Heater, for Unipotential Cathode:

Voltage (AC or DC)	6.3 ± 10%	volts
Current at 6.3 volts	0.6	amp

Cathode:

Minimum heating time prior to tube conduction	10	sec
---	----	-----

Direct Interelectrode Capacitances (Approx.):*

Grid No.1 to anode	0.15	μf
Grid No.1 to cathode and grid No.2	2.2	μf

Ionization Time (Approx.):

For dc anode volts = 100, grid-No.1 volts (square-wave pulse) = 50, peak anode amperes during conduction = 1	0.5	μsec
--	-----	------

Deionization Time (Approx.):

With dc anode volts = 125, grid-No.1 volts = -250, grid-No.1 resistor (ohms) = 1000, dc anode amperes = 0.1	50	μsec
---	----	------

With dc anode volts = 125, grid-No.1 volts = -10, grid-No.1 resistor (ohms) = 1000, dc anode amperes = 0.1	100	μsec
--	-----	------

Maximum Critical Grid-No.1 Current for

dc anode supply volts (rms) = 460, average anode amperes = 0.1	0.5	μa
--	-----	----

Anode Voltage Drop (Approx.) 8 volts

Grid-No.1 Control Ratio (Approx.) for grid-

No.1 resistor (ohms) = 0, grid No.2 connected to cathode at socket	250
--	-----

Grid-No.2 Control Ratio (Approx.) for

grid-No.1 resistor (ohms) = 0, grid-No.2 resistor (ohms) = 0, grid No.1 connected to cathode at socket	800
--	-----

Mechanical:

Operating Position Any

Maximum Overall Length 3-1/16"

Maximum Seated Length 2-1/2"

Maximum Diameter 1-9/32"

Dimensional Outline See *General Section*

Bulb T9


Base Intermediate-Shell Octal 6-Pin, Arrangement 3, with External Barriers (JEDEC Group 1, B6-229)



2050-A

Basing Designation for BOTTOM VIEW. 6BS

Pin 2 - Heater
 Pin 3 - Anode
 Pin 5 - Grid No.1



Pin 6 - Grid No.2
 Pin 7 - Heater
 Pin 8 - Cathode

RELAY AND GRID-CONTROLLED-RECTIFIER SERVICE

Maximum and Minimum Ratings, Absolute-Maximum Values:

For anode supply frequency of 60 cps

PEAK ANODE VOLTAGE:			
Forward	180 max.	650 max.	volts
Inverse	360 max.	1300 max.	volts
GRID-No.2 (SHIELD-GRID) VOLTAGE:			
Peak, before tube conduction	-100 max.	-100 max.	volts
Average ^b , during tube conduction	-10 max.	-10 max.	volts
GRID-No.1 (CONTROL-GRID) VOLTAGE:			
Peak, before tube conduction	-250 max.	-250 max.	volts
Average ^b , during tube conduction	-10 max.	-10 max.	volts
CATHODE CURRENT:			
Peak	1 max.	1 max.	amp
Average ^b	0.2 max.	0.1 max.	amp
Fault, for duration of 0.1 second maximum	10 max.	10 max.	amp
GRID-No.2 CURRENT:			
Average ^b	+0.01 max.	+0.01 max.	amp
GRID-No.1 CURRENT:			
Average ^b	+0.01 max.	+0.01 max.	amp
PEAK HEATER-CATHODE VOLTAGE:			
Heater negative with respect to cathode . . .	100 max.	100 max.	volts
Heater positive with respect to cathode . . .	25 max.	25 max.	volts
AMBIENT-TEMPERATURE RANGE.	-75 to +90	-75 to +90	°C

Typical Operation for Relay Service:

RMS Anode Voltage	117	400	volts
Grid No.2	<i>Connected to cathode at socket</i>		
RMS Grid-No.1 Bias Voltage ^c	5	-	volts
DC Grid-No.1 Bias Voltage	-	-6	volts
Peak Grid-No.1 Signal Voltage	5	6	volts
Grid-No.1-Circuit			
Resistance	1	1	megohm
Anode-Circuit Resistance ^d	1200	2000	ohms



Maximum Circuit Values:

Grid-No.1-Circuit Resistance:

For average anode current below	
0.1 ampere.	10 max. megohms
For average anode current above	
0.1 ampere.	2 max. megohms

- ^a Without external shield.
^b Averaged over any interval of 30 seconds maximum.
^c Approximately 180° out of phase with the anode voltage.
^d Sufficient resistance, including the tube load, must be used under any conditions of operation to prevent exceeding the current ratings.

OPERATING CONSIDERATIONS

The *heater* is designed to operate on either ac or dc at 6.3 volts. Regardless of the heater-voltage supply used, *the heater voltage must never be allowed to deviate from its rated range.* Heater operation outside of this voltage range will impair tube performance and may cause tube failure. Low heater voltage causes low cathode temperature with resultant cathode sputtering and consequent destruction of the cathode; high heater voltage causes high cathode temperature with resultant heating of the grid and consequent grid emission which produces unpredictable shifts in the critical grid-No.1 voltage for conduction.

The *cathode* should be allowed to reach normal operating temperature before anode current is drawn. *The delay period should not be less than 10 seconds after application of heater voltage.* Unless this recommendation is followed, the cathode will be damaged.

The *shield grid* (grid No.2) is normally connected to the cathode at socket. It may, however, be used as a control electrode because the control characteristic of grid No.1 may be shifted by varying the potential of grid No.2. As grid No.2 is made negative, the grid-No.1 characteristic is shifted in the positive direction. The use of grid No.2 as the control electrode (with grid No.1 connected to cathode at socket) has the advantage of increased sensitivity but consideration must be given to the higher pre-conduction current, higher capacitance to anode, and less stability of operation.


A *grid-No.1 resistor* having a value as high as 10 megohms to give circuit sensitivity can be used with the 2050-A because its control-grid current is very low. However, when a high value of grid resistor is used, care should be taken to keep the tube base and socket clean and dry in order to make the effect of leakage currents between the control-grid base pin and anode base pin very small.

Sufficient anode-circuit resistance, including the tube load, must be used under any conditions of operation to prevent exceeding the current ratings of the tube.




2050-A

AVERAGE GRID-No.1 CHARACTERISTICS Before Tube Conduction

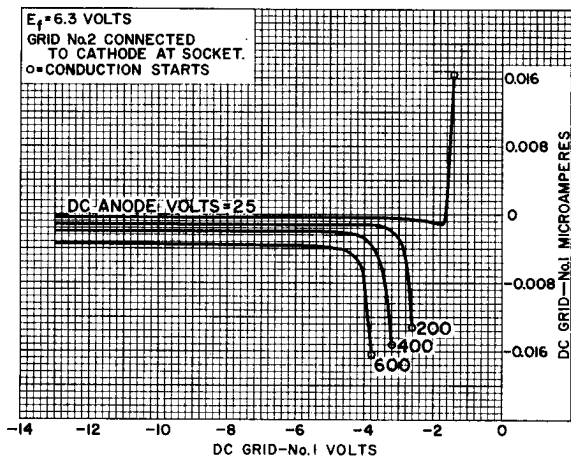


During Tube Conduction

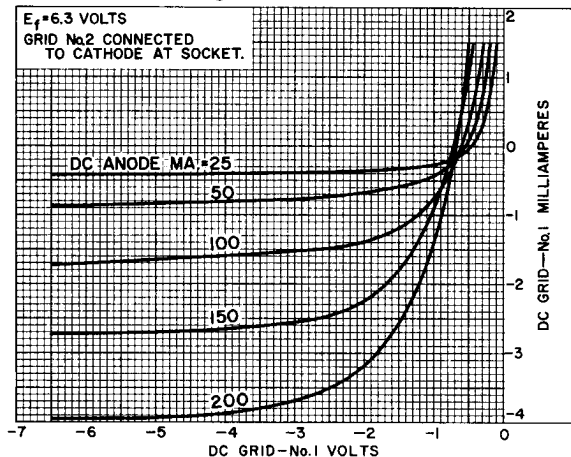

OPERATIONAL RANGE OF CRITICAL GRID-No.1 VOLTAGE

$E_f = 6.3 \pm 10\%$ VOLTS
 GRID No.2 CONNECTED TO CATHODE AT SOCKET.
 AMBIENT-TEMPERATURE RANGE ($^{\circ}\text{C}$) = -75 TO +90
 RANGES SHOWN ARE FOR TWO VALUES OF GRID-No.1 RESISTOR AND
 TAKE INTO ACCOUNT INITIAL DIFFERENCES BETWEEN INDIVIDUAL
 TUBES AND SUBSEQUENT DIFFERENCES DURING TUBE LIFE.

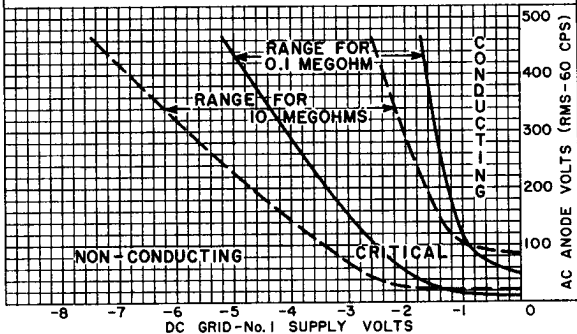


92CS-6540R3



2050-A

AVERAGE CONTROL CHARACTERISTICS

$E_f = 6.3$ VOLTS
GRID-№2 RESISTOR (OHMS) = 0
GRID-№1 RESISTOR (OHMS) = 0

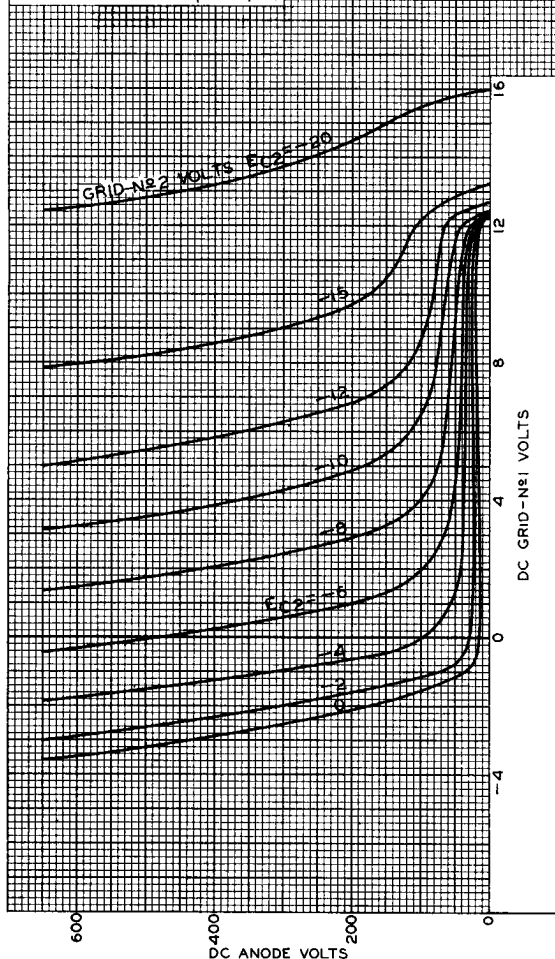

92CM-6274R2

