



CO.80 CARCINOTRON

The CO. 80 is a millimetric backward wave oscillator, delivering an output power of 10 to 30 watts over a frequency range of 39.5 to 40.5 gigahertz.

It can be amplitude modulated through its anode. Frequency modulation can be obtained by line voltage (1) variation, the frequency being independent of the load up to a VSWR of 3 : 1.

It is focused by an integral permanent magnet, and cooled by water circulation.

The relatively high power obtained at very high frequency makes it particularly suitable for physical measurements such as plasma analysis, parametric resonance, study of the fine structure of the matter. It can be used also for transmission measurements, scaling, etc

In short, the main features of the CO. 80 are :

- Minimum output power : 10 W from 39.5 to 40.0 GHz
30 W from 40.0 to 40.5 GHz
- Frequency and amplitude modulation.

(1) line voltage or beam voltage.




GENERAL CHARACTERISTICS

Electrical

	min.	max.	
Frequency	39.5	40.5	GHz
Heater voltage.....	7.1	7.8	V
Heater current	2.0	2.3	A
Wehnelt (2) voltage	0	-40	V
Wehnelt current	0	2	mA
Anode (3) voltage for 60 mA line current.....	1000	1500	V
Anode voltage for 80 mA line current	1500	1800	V
Anode current.....	0	5	mA
Line voltage (at lower frequencies)	3000	-	V
Line voltage (at higher frequencies)	-	6500	V
Line current.....	60	80	mA
Modulation sensitivity	0.5	1.5	MHz/V
Pushing	5	10	MHz/mA

(2) Wehnelt or Focusing electrode.

(3) Anode or Accelerator.

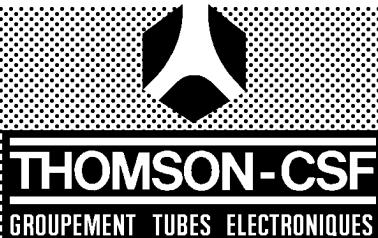

Mechanical

Operating position...	horizontal	RF output flange ...	UG 383/U
Focusing	permanent magnet	Input connector	see drawing
RF output waveguide	RG 97/U	Weight	16 kg

Cooling

Inlet water temperature max.	60 °C	Corresponding pressure drop 0.3 to 0.5 bar
Inlet pressure max.	1.5 bar	Ambiant temperature max. 60 °C
Flow-rate	1 to 1.5 l/mn	Water interlock supplied with the tube

ABSOLUTE RATINGS (1)

Heater voltage	min. 6.8 V	Wehnelt current.....	max. 5 mA
	max. 8.5 V	Anode voltage.....	max. 3000 V
Heater current.....	min. 1.9 A	Anode current	max. 10 mA
	max. 2.5 A	Line voltage	max. 7000 V
Surge current.....	max. 2.5 A	Line current	max. 80 mA
Warm-up time	min. 4 mn	Load VSWR.....	max. 5:1
Wehnelt voltage	max. 300 V		

TYPICAL OPERATION (1)

Heater voltage	7.7 V	Frequency	39.72	40.26	GHz
Heater current.....	2.2 A	Line voltage	5116	5810	V
Warm-up time	4 mn	Line current	80	80	mA
		Anode voltage.....	1680	1680	V
		Anode current	0	0	mA
		Wehnelt voltage ...	-10	-10	V
(1) All voltages are referred to the cathode		RF output power	see curves		

The tube can be operated beyond characteristic frequency range. Ask for information.

OPERATING INSTRUCTIONS

Supply : (see diagram)

The supply should feature

- the following starting sequence : Heater, Wehnelt, Line, Anode.
- Current limitations : Heater 2.5 A
Wehnelt 5 mA
Anode 5 mA
Line 80 mA

- Protection against shorts or flashes which could occur in the tube.
- Warm-up timing
- External water interlock for cooling circuit
- Line overvoltage (line voltage > Anode voltage + 1500 V) security device.

Application of voltages


- Start the liquid flow through the cooling circuit.
- Apply voltages in the following order : heater (allow four minutes minimum cathode warm-up time), Wehnelt, line, anode.

Protective measures


- A minimum distance of 25 cm should be kept between the tube and any magnetic material.
- Do not try to obtain modulation through the Wehnelt voltage.
- Operating parameters are given in each tube test data sheets, and are always within the absolute ratings indicated here.

CHARACTERISTIC CURVES


Heater voltage (dc) 7.7 V
 Heater current (dc) 2.2 A
 Wehnelt voltage (dc) -10 V
 Anode voltage (dc) 1680 V
 Line current (dc) 80 mA

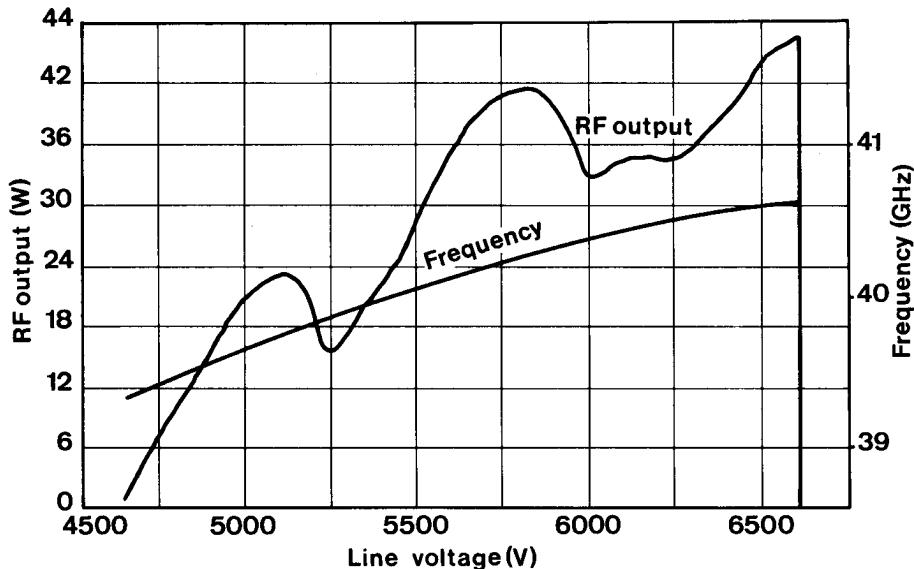



Heater voltage (dc) 7.7 V
 Heater current (dc) 2.2 A
 Wehnelt voltage (dc) -10 V
 Line voltage (dc) 4 kV

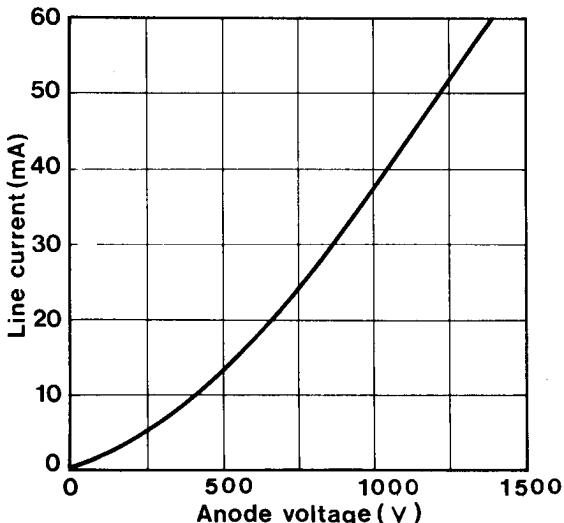



SUPPLY DIAGRAM

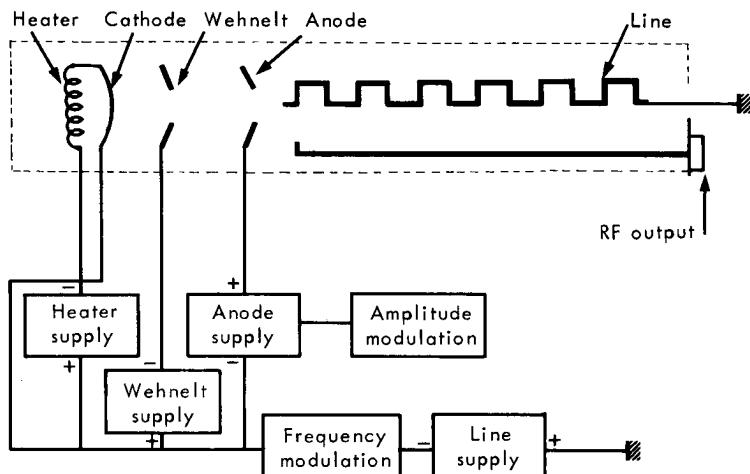

OUTLINE DRAWING

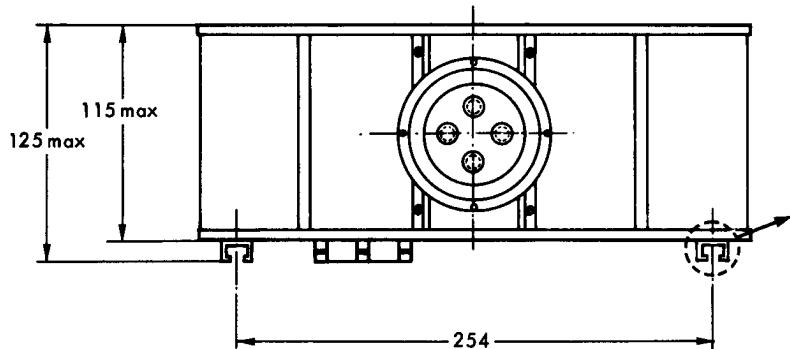

Positioning rail

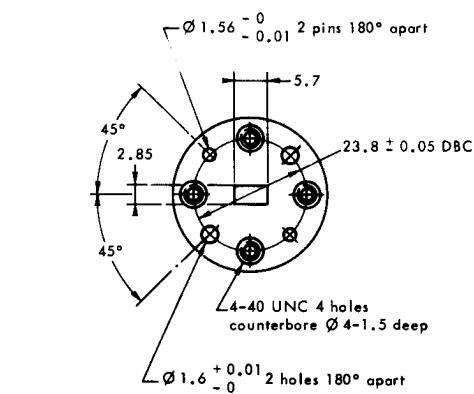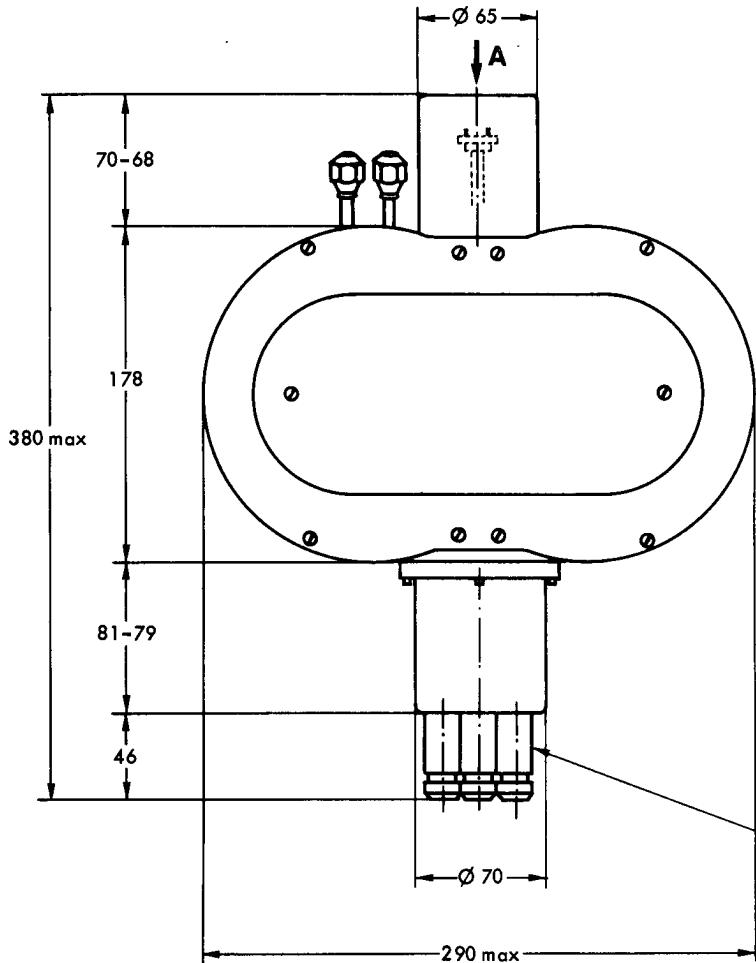RF output
VIEW A

High voltage connector
LEMO plug JUPITER type
ref III C 50 HT 10
CERN model

Dimensions in mm.

