

# WATER COOLED R.F. POWER TRIODE

<b>QUICK REFERENCE DATA</b>								
Frequency (MHz)	C telegraphy		C anode mod.		RF class B		AF class B Two tubes	
	V <sub>a</sub> (kV)	W <sub>o</sub> (kW)	V <sub>a</sub> (kV)	W <sub>o</sub> (kW)	V <sub>a</sub> (kV)	W <sub>o</sub> (kW)	V <sub>a</sub> (kV)	W <sub>o</sub> (kW)
10	15	120	11	66	15	110	12	78
30	12	90			12	110	10	78

**HEATING:** direct by A.C. or D.C.; filament thoriated tungsten

Filament voltage	$V_f$	=	12.6	V
Filament current	$I_f$	=	160	A

## CAPACITANCES

Grid to filament	$C_{gf}$	=	120	pF
Anode to filament	$C_{af}$	=	1.4	pF
Anode to grid	$C_{ag}$	=	50	pF

## TYPICAL CHARACTERISTICS

Anode voltage	$V_a$	=	3	kV
Anode current	$I_a$	=	1	A
Amplification factor	$\mu$	=	58	
Mutual conductance	$S$	=	60	mA/V

## TEMPERATURE LIMITS (Absolute limits)

Bulb temperature	$t$	= max. 220	°C
Seal temperature	$t$	= max. 220	°C

## COOLING

For cooling data see cooling curves.



For water inlet temperatures between 20 °C and 50 °C the required quantity of water can be found by proportional interpolation.

At frequencies higher than 10 MHz a low velocity air flow should be directed to the grid and filament seals.

**MECHANICAL DATA**

Net weight: 6.2 kg

Dimensions in mm

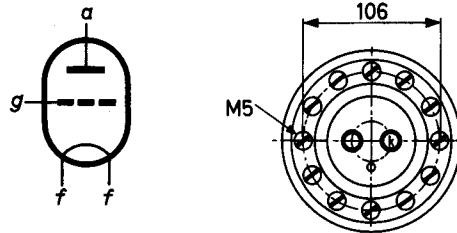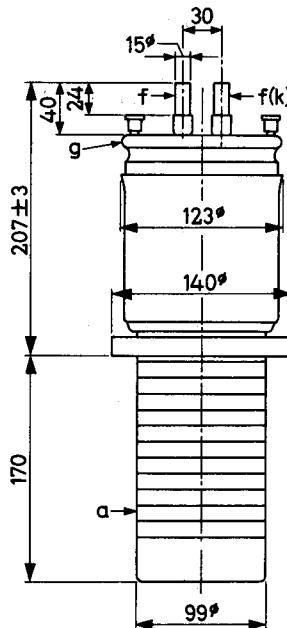

Mounting position: vertical with anode down

**ACCESSORIES**

Water jacket K724

Filament connector 40670

Grid connector 40671

## R.F. CLASS C TELEGRAPHY or F.M. TELEPHONY

## LIMITING VALUES (Absolute limits)

Frequency	f	up to	10	up to	30	MHz
Anode voltage	$V_a$	=	max.	16	max.	12.5 kV
Anode dissipation	$W_a$	=	max.	45	max.	45 kW
Negative grid voltage	$-V_g$	=	max.	1000	max.	1000 V
Grid dissipation	$W_g$	=	max.	1.3	max.	1.3 kW
Anode current	$I_a$	=	max.	13	max.	13 A
Grid current	$I_g$	=	max.	3.3	max.	3.3 A

## OPERATING CONDITIONS

Frequency	f	=	10	30	30	30	MHz
Anode voltage	$V_a$	=	15	12	10	8	kV
Grid voltage	$V_g$	=	-600	-550	-500	-450	V
Anode current	$I_a$	=	9.75	9.25	9.0	8.75	A
Grid current	$I_g$	=	2.2	2.2	2.1	1.85	A
Peak grid driving voltage	$V_{gp}$	=	1000	940	875	810	V
Grid driving power	$W_{dr}$	=	2.1	1.9	1.7	1.55	kW
Anode input power	$W_{ia}$	=	146	111	90	70	kW
Anode dissipation	$W_a$	=	26	21	18	15	kW
Output power	$W_o$	=	120	90	72	55	kW
Efficiency	$\eta$	=	82	81	80	78.5	%

**R.F. CLASS B AMPLIFIER****LIMITING VALUES (Absolute limits)**

Frequency	f	up to	10	up to	30	MHz
Anode voltage	$V_a$	=	max.	16	max.	12.5 kV
Anode dissipation	$W_a$	=	max.	45	max.	45 kW
Negative grid voltage	$-V_g$	=	max.	1000	max.	1000 V
Grid dissipation	$W_g$	=	max.	1.3	max.	1.3 kW
Anode current	$I_a$	=	max.	13	max.	13 A
Grid current	$I_g$	=	max.	3.3	max.	3.3 A

**OPERATING CONDITIONS**

Frequency	f	=	10	10	30	30	MHz
Anode voltage	$V_a$	=	15	15	12	12	kV
Grid voltage	$V_g$	=	-260	-260	-210	-210	V
Anode current	$I_a$	=	10.1	7.75	12.7	9.85	A
Grid current	$I_g$	=	2.0	1.3	3.0	1.9	A
Peak grid driving voltage	$V_{gp}$	=	600	520	650	520	V
Grid driving power	$W_{dr}$	=	1080	610	1770	880	W
Anode input power	$W_{ia}$	=	151	116.3	153	118	kW
Anode dissipation	$W_a$	=	41	31.3	43	33	kW
Output power	$W_o$	=	110	85	110	85	kW
Efficiency	$\eta$	=	73	73	72	72	%

**R.F. CLASS C ANODE MODULATION****LIMITING VALUES (Absolute limits)**

Frequency	f	up to	30	MHz
Anode voltage	$V_a$	= max.	11.5	kV
Anode dissipation	$W_a$	= max.	30	kW
Negative grid voltage	$-V_g$	= max.	1000	V
Grid dissipation	$W_g$	= max.	1.3	kW
Anode current	$I_a$	= max.	9	A
Grid current	$I_g$	= max.	3.3	A

**OPERATING CONDITIONS**

Frequency	f	=	30	30	MHz
Anode voltage	$V_a$	=	11	10	kV
Grid voltage	$V_g$	=	-480	-440	V <sup>1)</sup>
Anode current	$I_a$	=	7.6	6.9	A
Grid current	$I_g$	=	3.1	3.1	A
Grid resistor	$R_g$	=	90	80	$\Omega$
Peak grid driving voltage	$V_{gp}$	=	880	810	V
Grid driving power	$W_{dr}$	=	2.7	2.4	kW
Anode input power	$W_{ia}$	=	83.6	69	kW
Anode dissipation	$W_a$	=	17.6	14	kW
Output power	$W_o$	=	66	55	kW
Efficiency	$\eta$	=	79	79	%
Modulation depth	m	=	100	100	%
Modulation power	$W_{mod}$	=	41.8	34.5	kW



<sup>1)</sup> Partially obtained by the grid resistor and grid current.



**A.F. CLASS B AMPLIFIER AND MODULATOR****LIMITING VALUES (Absolute limits)**

Anode voltage	$V_a$	=	max.	12	kV
Anode dissipation	$W_a$	=	max.	45	kW
Negative grid voltage	$-V_g$	=	max.	1000	V
Grid dissipation	$W_g$	=	max.	1.3	kW
Anode current	$I_a$	=	max.	13	A
Grid current	$I_g$	=	max.	3.3	A

**OPERATING CONDITIONS (two tubes in push-pull)**

Anode voltage	$V_a$	=	12	10	kV
Grid voltage	$V_g$	=	-205	-170	V
Load resistance	$R_{aa\sim}$	=	2720	1810	$\Omega$
Peak grid driving voltage	$V_{ggp}$	=	0	710	0
Anode current	$I_a$	=	2x0.4	2x4.75	2x0.4
Average grid current	$I_g$	=	0	2x0.45	0
Peak grid current	$I_{gp}$	=	0	2x2.9	0
Grid driving power	$W_{dr}$	=	0	2x150	0
Anode input power	$W_{ia}$	=	2x4.0	2x57	2x4.0
Anode dissipation	$W_a$	=	2x4.0	2x18	2x4.0
Output power	$W_o$	=	0	78	0
Efficiency	$\eta$	=	-	68.5	-
					68 %

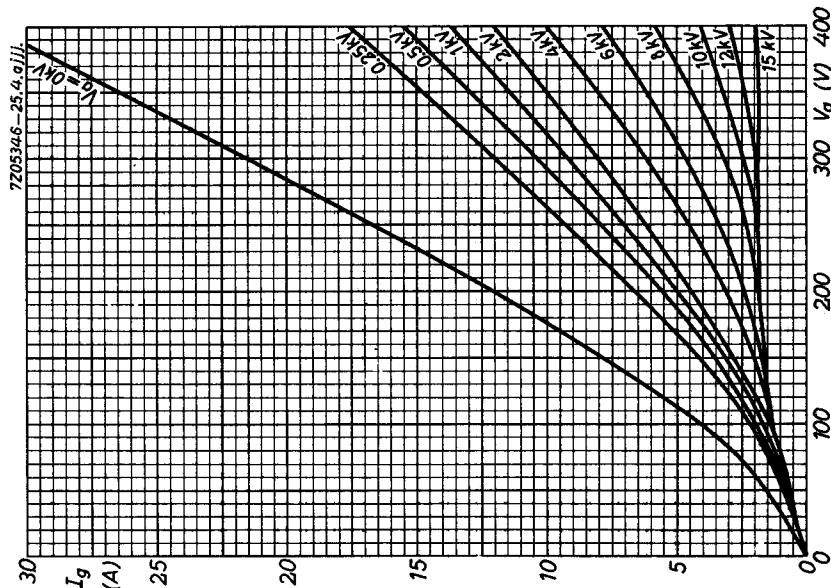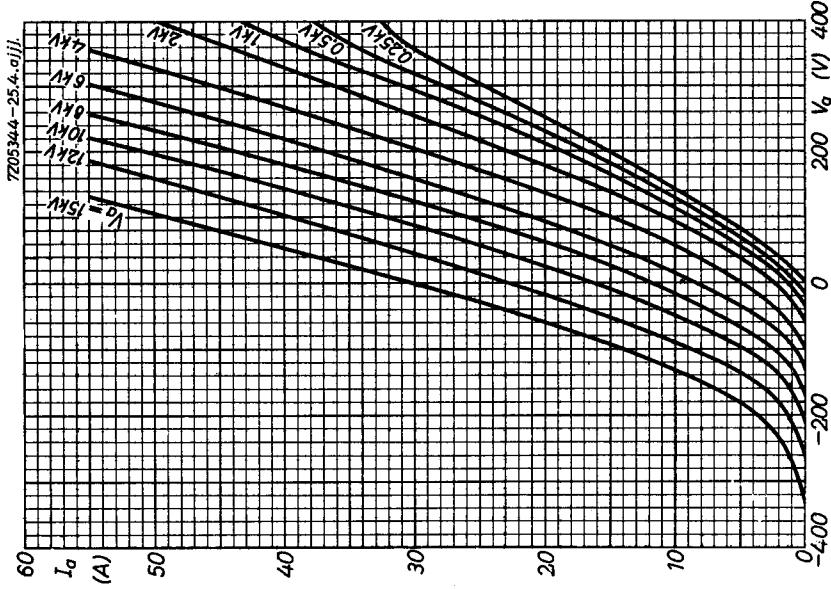

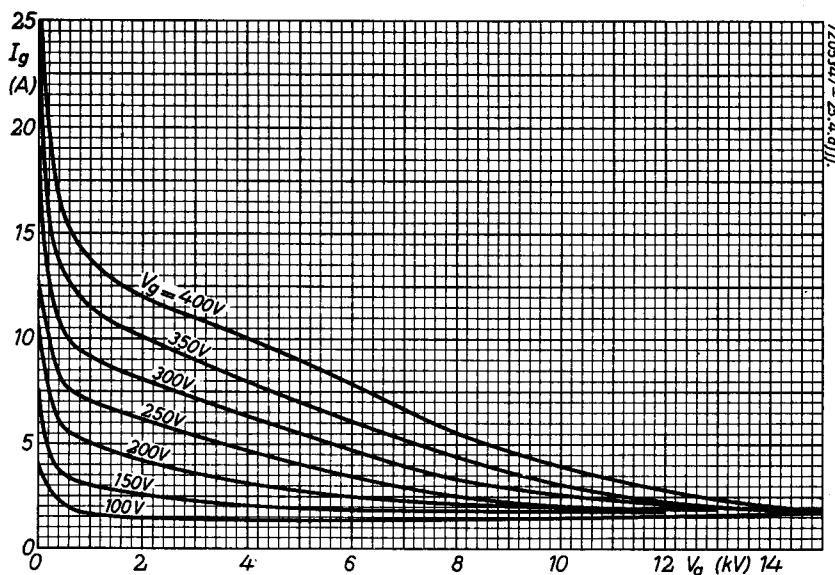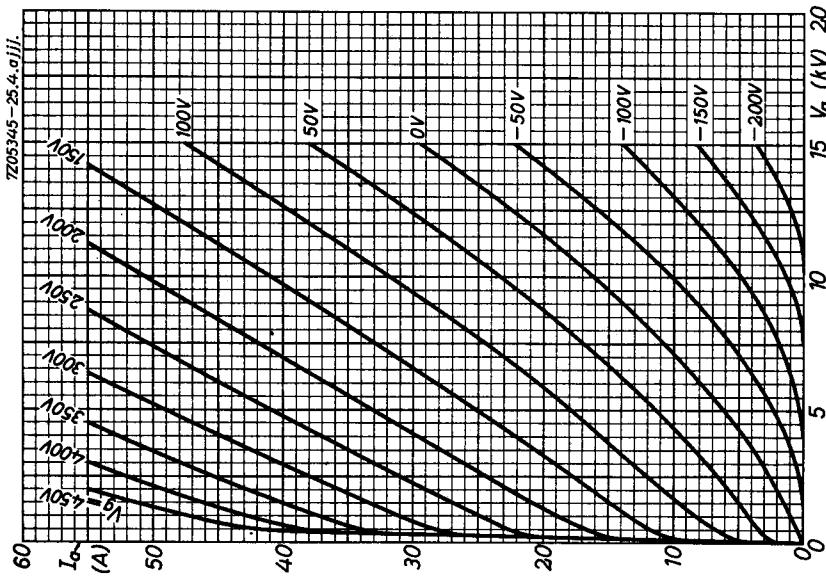

7205348-25.4.ajj.

