

**AIR COOLED R.F. POWER TRIODE**

Frequency (MHz)	QUICK REFERENCE DATA					
	C telegraphy		C anode mod.		C television Two tubes	
	V <sub>a</sub> (kV)	W <sub>o</sub> (kW)	V <sub>a</sub> (kV)	W <sub>o</sub> (kW)	V <sub>a</sub> (kV)	W <sub>o</sub> (kW)
30	4	4.0				
	5	5.6				
	6	6.9				
75			5	4.7		
110	5	4.8	4	2.8		
220	3	2.65			5	9.5
48 to 75						

**HEATING:** direct; filament thoriated tungsten

Filament voltage                                    V<sub>f</sub> = 12.6 V

Filament current                                    I<sub>f</sub> = 33 A

The connection f<sub>C</sub> is intended for use as cathode return. It is not an electrical centre tap and must not be used for filament current supply. At frequencies above 30 MHz the three filament leads should be interconnected by suitable capacitors.

**CAPACITANCES**

Anode to filament                                    C<sub>af</sub> = 0.3 pF

Grid to filament                                    C<sub>gf</sub> = 16 pF

Anode to grid                                        C<sub>ag</sub> = 11 pF

**TYPICAL CHARACTERISTICS**

Anode voltage                                        V<sub>a</sub> = 4.0 kV

Anode current                                        I<sub>a</sub> = 1.0 A

Amplification factor                                 $\mu$  = 32

Mutual conductance                                S = 17 mA/V

**TEMPERATURE LIMITS (Absolute limits)**

Temperature of anode and grid seals

 $t = \text{max. } 180^{\circ}\text{C}$ 

Temperature of pin seals

 $t = \text{max. } 220^{\circ}\text{C}$ 

Air inlet temperature

 $t_i = \text{max. } 45^{\circ}\text{C}$ **AIR COOLING CHARACTERISTICS**


$W_a$ (kW)	$h$ (m)	$t_i$ ( $^{\circ}\text{C}$ )	$q_{\min}$ ( $\text{m}^3/\text{min}$ )	$p_i$ (mm H <sub>2</sub> O)
1	0	35	3.0	8
	0	45	3.1	8
	1500	35	3.7	9
	3000	25	4.1	10
3	0	35	5.2	23
	0	45	6.1	29
	1500	35	6.2	26
	3000	25	6.6	26
5	0	35	9.2	68
	0	45	10.7	90
	1500	35	11.2	81
	3000	25	11.6	79

It may be necessary to direct an air flow to the seals to keep them within the temperature limits.

**MECHANICAL DATA**

Net weight: 3.4 kg

Dimensions in mm

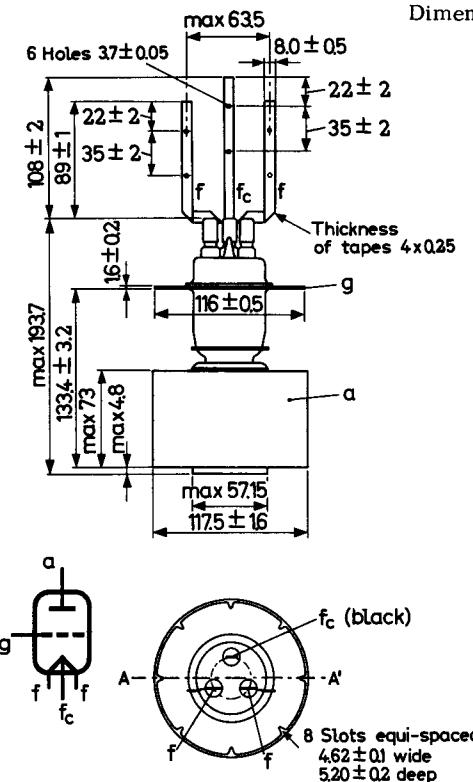

The plane of the filament is parallel to AA' to within  $3\frac{1}{2}^{\circ}$

Mounting position: vertical with base up or down

## R.F. CLASS C TELEGRAPHY or F.M. TELEPHONY

## LIMITING VALUES (Absolute limits)

Frequency	f	up to	75	110	220	MHz
Anode voltage	$V_a$	= max.	6.2	5.5	4.0	kV
Anode current	$I_a$	= max.	1.5	1.5	1.5	A
Anode input power	$W_{ia}$	= max.	9.3	8.2	6.0	kW
Anode dissipation	$W_a$	= max.	5.0	5.0	5.0	kW
Negative grid voltage	$-V_g$	= max.	1000	1000	1000	V
Grid current	$I_g$	= max.	350	350	350	mA

## OPERATING CONDITIONS

Frequency	f	=	30	30	30	110	220 <sup>1)</sup>	MHz
Anode voltage	$V_a$	=	6.0	5.0	4.0	5.0	3.0	kV
Grid voltage	$V_g$	=	-400	-300	-200	-300	-160	V
Anode current	$I_a$	=	1.5	1.5	1.37	1.25	1.25	A
Grid current	$I_g$	=	310	330	300	300	250	mA
Driver output power	$W_{dr}$	=	275	240	190	250	510	W
Anode input power	$W_{ia}$	=	9.0	7.5	5.5	6.25	3.75	kW
Anode dissipation	$W_a$	=	2.1	1.9	1.5	1.45	1.6	kW
Output power	$W_o$	=	6.9	5.6	4.0	4.8	2.65	kW
Tube efficiency	$\eta$	=	76.5	75	73	77	70	%
Output power in the load	$W_l$	=	5.5	4.5	3.2	3.9	2.15	kW

<sup>1)</sup> In grounded grid circuit

## R.F. CLASS C ANODE MODULATION

## LIMITING VALUES (Absolute limits)

Frequency	f	up to	75	110	220	MHz
Anode voltage	$V_a$	=	max.	5.0	4.5	3.2 kV
Anode current	$I_a$	=	max.	1.3	1.3	1.3 A
Anode input power	$W_{i_a}$	=	max.	6.5	5.8	4.0 kW
Anode dissipation	$W_a$	=	max.	3.4	3.4	3.4 kW
Negative grid voltage	$-V_g$	=	max.	1000	1000	1000 V
Grid current	$I_g$	=	max.	350	350	350 mA

## OPERATING CONDITIONS

Frequency	f	=	75	110	MHz
Anode voltage	$V_a$	=	5.0	4.0	kV
Grid voltage	$V_g$	=	-400	-350	V
Anode current	$I_a$	=	1.2	0.93	A
Grid current	$I_g$	=	300	240	mA
Driver output power	$W_{dr}$	=	205	130	W
Anode input power	$W_{i_a}$	=	6.0	3.72	kW
Anode dissipation	$W_a$	=	1.3	0.92	kW
Output power	$W_o$	=	4.7	2.8	kW
Tube efficiency	$\eta$	=	78.5	75	%
Output power in the load	$W_l$	=	3.75	2.25	kW
Modulation depth	m	=	100	100	%
Modulation power	$W_{mod}$	=	2.4	1.4	kW

R.F. CLASS C AMPLIFIER FOR TELEVISION SERVICE ; negative modulation,  
positive synchronisation

**LIMITING VALUES** (Absolute limits)

Frequency	f		up to	75	up to	220	MHz
Anode voltage	$V_a$	=	max.	5.0	max.	4.0	kV
Anode current	$I_a$	sync	=	max.	2.0	max.	1.6 A
Anode input power	$W_{i_a}$		=	max.	10	max.	6.4 kW
Anode dissipation	$W_a$	sync	=	max.	4.0	max.	4.0 kW
Negative grid voltage	$-V_g$	sync	=	max.	1000	max.	1000 V
Grid dissipation	$W_g$	sync	=	max.	120	max.	120 W

**OPERATING CONDITIONS** (Two tubes in push-pull, common cathode bias modulated)

Frequency	f	=	48 to 75	MHz	
Bandwidth (- 3 dB)	B	=	8.0	MHz	
Anode voltage	$V_a$	=	5.0	kV	
Grid voltage	$V_g$	sync	=	-200	V
	$V_g$	black	=	-300	V
	$V_g$	white	=	-550	V
Anode current	$I_a$	sync	=	2x1.9	A
	$I_a$	black	=	2x1.3	A
Grid current	$I_g$	sync	=	2x250	mA
	$I_g$	black	=	2x175	mA
Driver output power	$W_{dr}$	sync	=	250	W
Output power	$W_o$	sync	=	9.5	kW
Output power in the load	$W_\ell$	sync	=	6.3	kW

**A.F. CLASS B AMPLIFIER AND MODULATOR****LIMITING VALUES** (Absolute limits)


Anode voltage	$V_a$	=	max.	6.0	kV
Anode current	$I_a$	=	max.	1.8	A
Anode input power	$W_{ia}$	=	max.	10.5	kW
Anode dissipation	$W_a$	=	max.	5.0	kW


**OPERATING CONDITIONS** (Two tubes in push-pull)

Anode voltage	$V_a$	=	6.0	kV
Grid voltage	$V_g$	=	-165	$V^1)$
Load resistance	$R_{aa\sim}$	=	4.9	$k\Omega$
Grid driving voltage	$V_{gg}$	=	0	645 V(RMS)
Anode current	$I_a$	=	2x125	2x1500 mA
Grid current	$I_g$	=	0	2x280 mA
Driving power	$W_{dr}$	=	0	2x115 W
Anode input power	$W_{ia}$	=	2x0.75	2x9.0 kW
Anode dissipation	$W_a$	=	2x0.75	2x2.35 kW
Output power	$W_o$	=	0	13.3 kW
Efficiency	$\eta$	=	-	74 %
Total harmonic distortion	$d_{tot}$	=	-	4.3 %

<sup>1)</sup> To be adjusted for zero signal anode current of 125 mA.

7Z05351 - 25.4.aabj

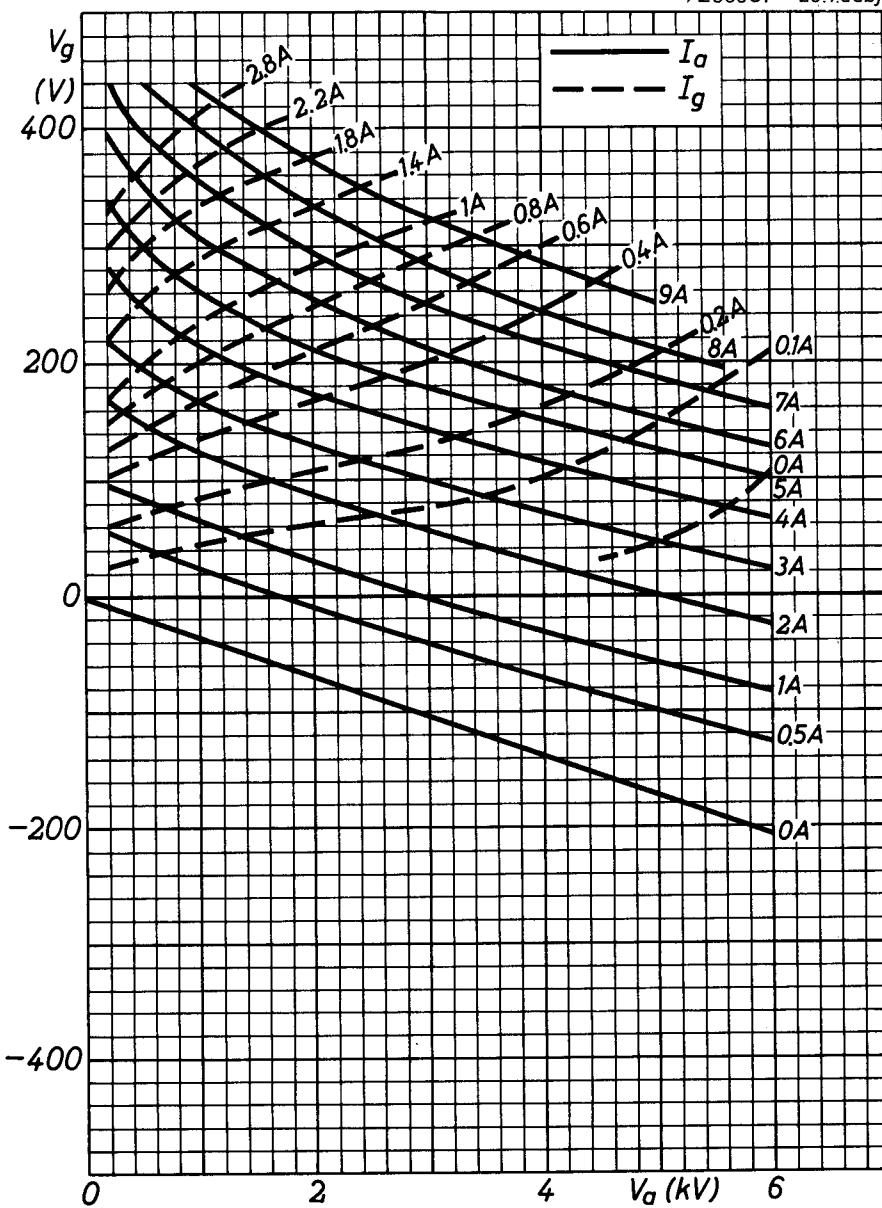

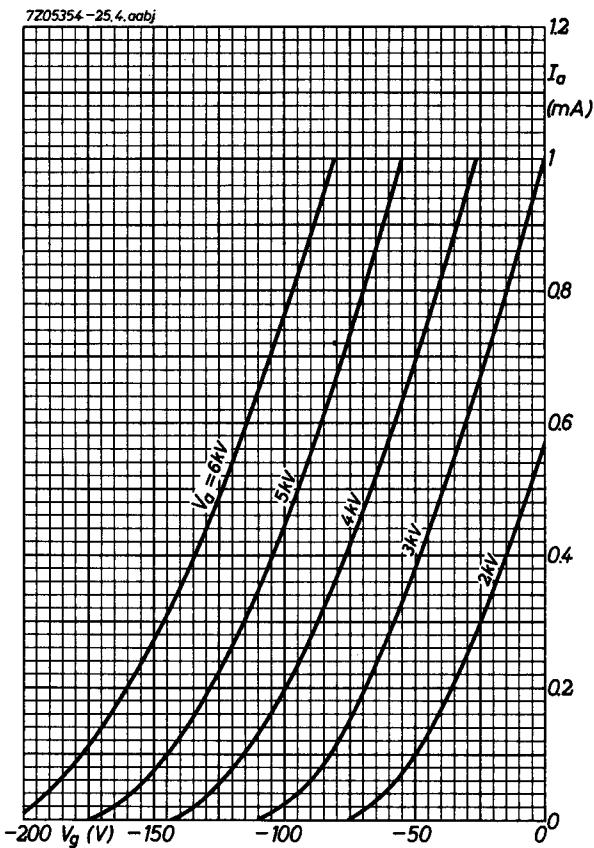

7Z05352-25.4aabj

