



12CA5

12CA5

# BEAM POWER TUBE

MINIATURE TYPE

Intended for use in equipment having series heater-string arrangement

## GENERAL DATA

### Electrical:

Heater, for Unipotential Cathode:

Voltage . . . . .	12.6	. . . . .	ac or dc volts
Current . . . . .	0.6	. . . . .	amp
Warm-up time (Average) . . . . .	11	. . . . .	sec

For definition of heater warm-up time and method of determining it, see sheet HEATER WARM-UP TIME MEASUREMENT at front of this Section.


Direct Interelectrode Capacitances (Approx.):<sup>o</sup>

Grid No.1 to plate . . . . .	0.5		$\mu\mu\text{f}$
Grid No.1 to cathode & grid No.3, grid No.2, and heater. . . . .	15		$\mu\mu\text{f}$
Plate to cathode & grid No.3, grid No.2, and heater. . . . .	9		$\mu\mu\text{f}$

### Mechanical:

Mounting Position . . . . .	Any
Maximum Overall Length . . . . .	2-5/8"
Maximum Seated Length . . . . .	2-3/8"
Length, Base Seat to Bulb Top (Excluding tip) . . . . .	2" $\pm$ 3/32"
Maximum Diameter . . . . .	3/4"
Bulb . . . . .	T-5-1/2
Base . . . . .	Small-Button Miniature 7-Pin (JETEC No.E7-1)
Basing Designation for BOTTOM VIEW . . . . .	.7CV

Pin 1 - Cathode,  
Grid No.3  
Pin 2 - Grid No.1  
Pin 3 - Heater



Pin 4 - Heater  
Pin 5 - Grid No.1  
Pin 6 - Grid No.2  
Pin 7 - Plate

## AMPLIFIER - Class A<sub>1</sub>

Maximum Ratings, Design-Center Values:

PLATE VOLTAGE . . . . .	130 max.	volts
GRID-No.2 (SCREEN) VOLTAGE . . . . .	130 max.	volts
GRID-No.1 (CONTROL-GRID) VOLTAGE:		
Positive bias value . . . . .	0 max.	volts
PLATE DISSIPATION . . . . .	5 max.	watts
GRID-No.2 INPUT . . . . .	1.4 max.	watts
PEAK HEATER-CATHODE VOLTAGE:		
Heater negative with respect to cathode . . . . .	200 max.	volts
Heater positive with respect to cathode . . . . .	200 <sup>▲</sup> max.	volts
BULB TEMPERATURE (At hottest point on bulb surface) . . . . .	180 max.	<sup>o</sup> C

<sup>o</sup> without external shield.

<sup>▲</sup> The dc component must not exceed 100 volts.

12CA5



12CA5

**BEAM POWER TUBE**

**Typical Operation and Characteristics:**

Plate Voltage. . . . .	110	125	volts
Grid-No.2 Voltage. . . . .	110	125	volts
Grid-No.1 Voltage. . . . .	-4	-4.5	volts
Peak AF Grid-No.1 Voltage. . . . .	4	4.5	volts
Zero-Signal Plate Current. . . . .	32	37	ma
Max.-Signal Plate Current. . . . .	31	36	ma
Zero-Signal Grid-No.2 Current. . . . .	3.5	4	ma
Max.-Signal Grid-No.2 Current. . . . .	7.5	11	ma
Plate Resistance (Approx.) . . . . .	16000	15000	ohms
Transconductance . . . . .	8100	9200	$\mu$ mhos
Load Resistance. . . . .	3500	4500	ohms
Total Harmonic Distortion. . . . .	5	6	%
Max.-Signal Power Output . . . . .	1.1	1.5	watts

**Maximum Circuit Values:**

Grid-No.1-Circuit Resistance:		
For fixed-bias operation . . . . .	0.1 max.	megohm
For cathode-bias operation . . . . .	0.5 max.	megohm




12CA5

12CA5

### AVERAGE PLATE CHARACTERISTICS

$E_f = 12.6$  VOLTS    GRID-N#2 VOLTS = 125

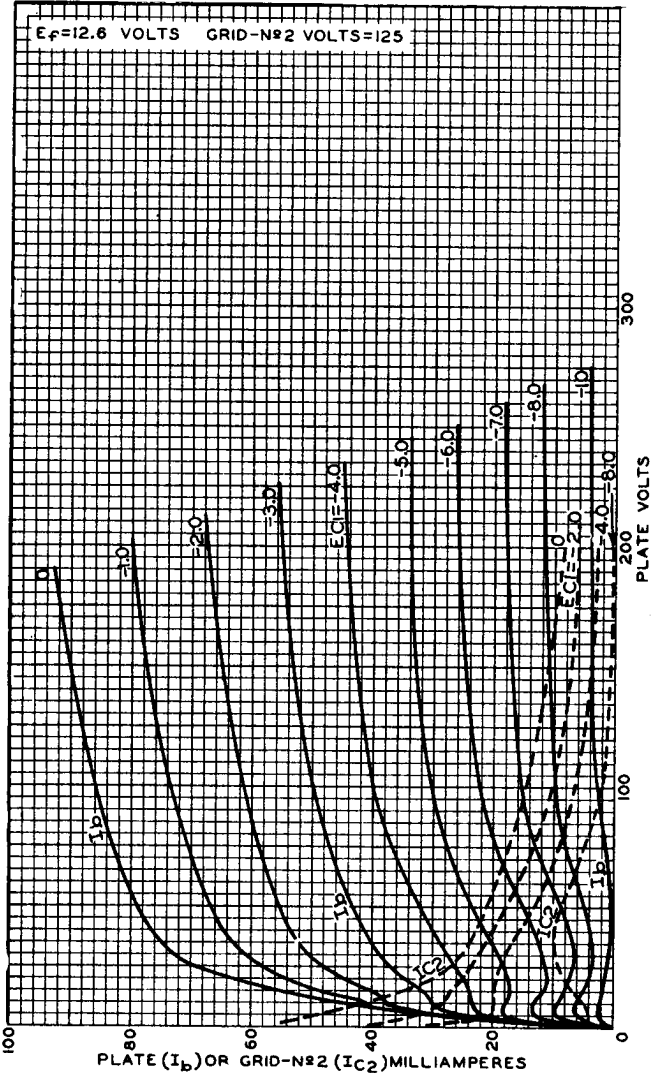

JAN. 24, 1955

TUBE DIVISION

92CM-8507

RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY


12CA5



12CA5

# OPERATION CHARACTERISTICS

$E_f = 12.6$  VOLTS    PLATE VOLTS = 125    GRID-N<sup>o</sup>2 VOLTS = 125  
GRID-N<sup>o</sup>1 VOLTS = -4.5    SIGNAL VOLTS (RMS) = 3.2

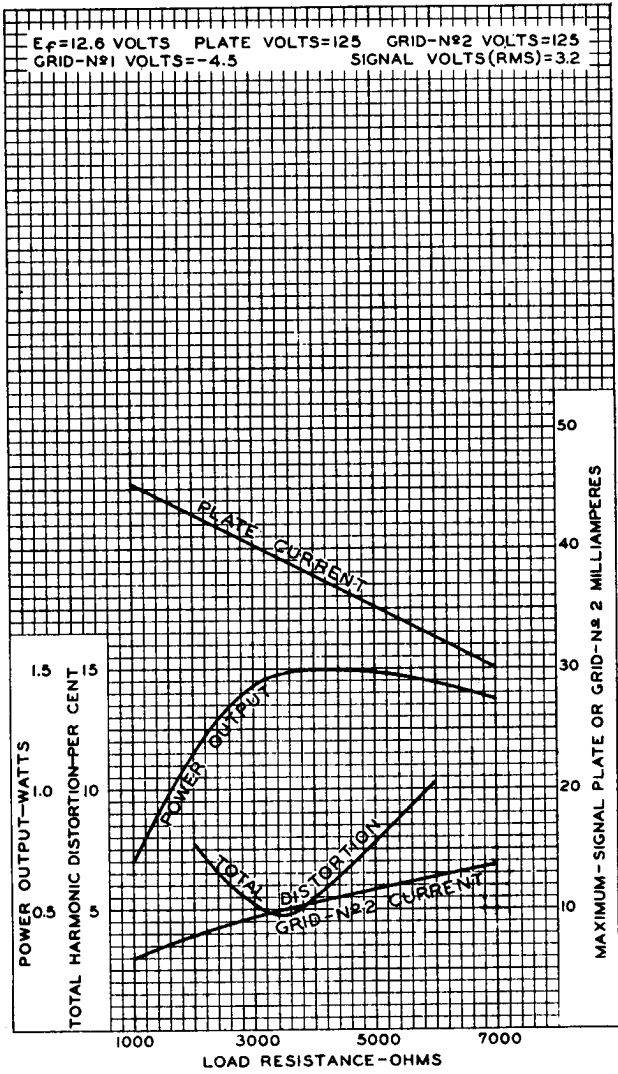

JAN. 20, 1955

TUBE DIVISION

92CM-8506R1

RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY