



6AQ7-GT

Description and Rating

DUPLEX-DIODE TRIODE

GENERAL DESCRIPTION

Principal Application: The 6AQ7-GT is a duplex-diode high-mu triode in which separate cathodes are provided for the diode and triode sections. The tube is


Cathodes: Coated Unipotential
 Heater Voltage (A-C or D-C) 6.3 Volts
 Heater Current 0.3 Ampere
 Envelope: T-9, Glass
 Base: B8-6, Intermediate Shell Octal 8-Pin
 or B8-46, Short Intermediate Shell Octal 8-Pin
 Mounting Position: Any

designed for service as a combined FM detector and audio amplifier in circuits which require the separated cathodes.

Direct Interelectrode Capacitances:

Grid to Triode Plate #	3.0	$\mu\mu\text{f}$
Triode Input #	2.8	$\mu\mu\text{f}$
Triode Output #	3.2	$\mu\mu\text{f}$
Grid to Diode Cathode (Max) #	0.25	$\mu\mu\text{f}$
Diode 1 Plate to Diode Cathode*	2.2	$\mu\mu\text{f}$
Diode 2 Plate to Diode Cathode*	2.4	$\mu\mu\text{f}$
Diode 1 Plate to Diode 2 Plate*	0.5	$\mu\mu\text{f}$

PHYSICAL DIMENSIONS

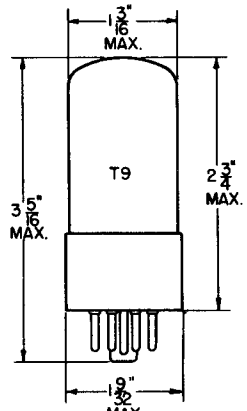


RTMA 9-11 or 9-41

TERMINAL CONNECTIONS

- Pin 1 - Diode Number 2 Plate
- Pin 2 - Diode Cathode
- Pin 3 - Diode Number 1 Plate
- Pin 4 - Triode Grid
- Pin 5 - Triode Plate
- Pin 6 - Triode Cathode
- Pin 7 - Heater
- Pin 8 - Heater

BASING DIAGRAM



RTMA BCK
BOTTOM VIEW

DESIGN CENTER VALUES:

Plate Voltage	250	Volts
Positive D-C Grid Voltage	0	Volts
Plate Dissipation	1.0	Watt
Heater-Cathode Voltage	90	Volts
Diode Current for Continuous Operation (Each Diode)	0.9	Milliampere

MAXIMUM RATINGS

CLASS A₁ AMPLIFIER

CHARACTERISTICS AND TYPICAL OPERATION

Plate Voltage	100	250	Volts
Grid Voltage	-1	-2	Volts
Amplification Factor	79	70	
Plate Resistance (Approx)	64000	44000	Ohms
Transconductance	1250	1600	Micromhos
Plate Current	1.1	2.3	Milliamperes


Average Diode Current: (Each Diode)
 Measured with 10 Volts D-C Applied 4.0 Milliamperes

With external shield #308 connected to triode cathode
 * With external shield #308 connected to diode cathode



CLASS A RESISTANCE-COUPLED AMPLIFIER

Rp Meg	Rg1 Meg	Rs Meg	Ebb = 90 Volts			Ebb = 180 Volts			Ebb = 300 Volts		
			Rk	Gain	Eo	Rk	Gain	Eo	Rk	Gain	Eo
0.10	*	0.10	4300	21	6.0	2200	27	20	1800	30	36
0.10	*	0.24	4700	25	7.5	2400	32	26	2200	34	49
0.24	*	0.24	7100	28	8.5	4300	36	26	3600	38	47
0.24	*	0.51	7800	32	11	4700	40	30	3900	42	56
0.51	*	0.51	11500	33	10	7500	42	28	6200	45	51
0.51	*	1.0	12500	38	12	8200	45	35	6800	48	60
0.24	10	0.24	0	32	5.0	0	40	19	0	43	38
0.24	10	0.51	0	36	7.0	0	45	25	0	49	48
0.51	10	0.51	0	37	6.5	0	47	23	0	50	43
0.51	10	1.0	0	40	9.5	0	49	28	0	53	53

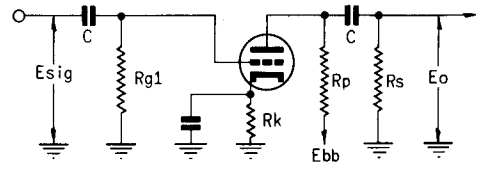


Note: Coupling capacitors (C) should be selected to give desired frequency response. Rk should be adequately by-passed.

Notes: 1. Eo is maximum rms voltage output for five percent (5%) total harmonic distortion. 2. Gain measured at 2.0 volts rms output. 3. For zero-bias data generator impedance is negligible. *Value of Rg1 is non-critical.

AVERAGE PLATE CHARACTERISTICS

TRIODE SECTION

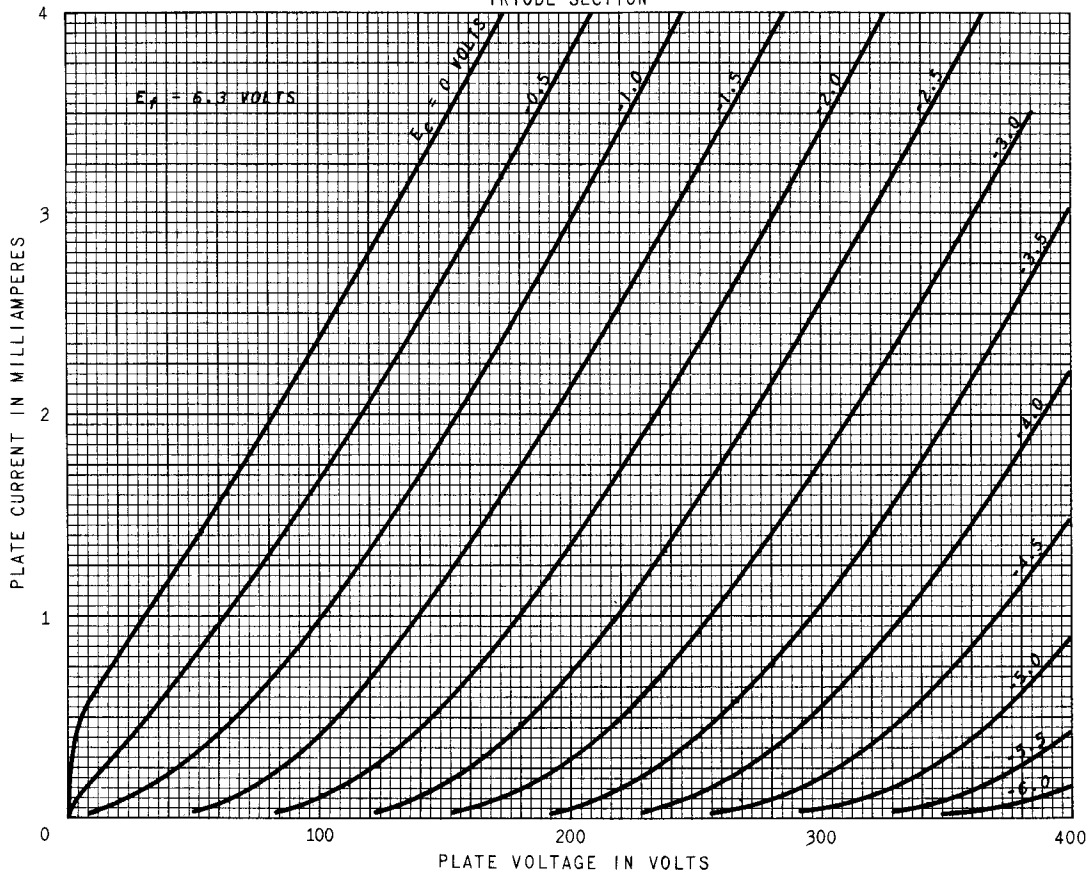

Tube Divisions, Electronics Department



Schenectady, N. Y.