

engineering data service

12AC6

MECHANICAL DATA

Bulb .																1	-5 1/2
Base.								E	7-	1, N	Лiг	iiat	ure	: B	utt	on	7-Pin
Outline																	
Basing																	7BK
Cathode																	
Mountin	ıg	Pos	siti	on													Any

ELECTRICAL DATA

HEATER CHARACTERISTICS

Heater Voltage ¹			12.6 Volts	
Heater Current			150 Ma	
Heater-Cathode Voltage (Design Center Values)			
Heater Negative with Respect to Cathode			30 Volts	Max.
Heater Positive with Respect to Cathode			30 Volts	Max.

DIRECT INTERELECTRODE CAPACITANCES

									Shielded ²	Unshielded
Grid No.	1	to	Pla	ıte					.004	.005 μμf
Input .									4.3	4.3 μμf
Oûtput										5.0 μμf

RATINGS (Design Center Values)

Plate Voltage							30 Volts	Max.
Grid No. 2 Voltage							30 Volts	Max.
Cathode Current							20 Ma	Max.
Grid No. 1 Circuit Resista	nce						10 Megohm	s Max.

CHARACTERISTICS AND TYPICAL OPERATION

Class A₁ Amplifier

Plate Voltage	12.6 Volts										
Plate Voltage	at Socket) . 0 Volts										
Grid No. 2 Voltage	12.6 Volts										
Grid No. 1 Voltages											
Grid No. 1 Resistor	2.2 Megohms										
Plate Current	550 μa										
Grid No. 2 Current											
Transconductance4	730 μmhos										
Plate Resistance (Approx.)	0.5 Megohm										
Plate Resistance (Approx.)											
Ec3 = 0 	5.2 Volts										
Grid No. 3 Voltage for $Gm = 10 \mu mhos$ (Approx.),											
Ec1 = 0 	–3.7 Volts										


NOTES:


- 1. This tube is intended for use in automobile radios operated from a nominal 12 volt battery. Design of the tube is such that the heater will operate satisfactorily over the range 10.0 volts to 15.9 volts, and that the maximum ratings provide a safety factor for the wide voltage variation encountered with this type of supply.
- 2. Shield No. 316.
- 3. Average contact potential is developed across the specified grid resistor.
- 4. Measured from Grid No. 1 to plate.

QUICK REFERENCE DATA

The Sylvania Type 12AC6 is a miniature remote cutoff pentode intended for use as an RF or IF amplifier.

It is designed for operation where the heater, plate and screen voltages are supplied directly from a 12 volt automotive storage battery.






SYLVANIA ELECTRIC PRODUCTS INC. RADIO TUBE DIVISION EMPORIUM, PA.

Prepared and Released By The
TECHNICAL PUBLICATIONS SECTION
EMPORIUM, PENNSYLVANIA
FEBRUARY, 1957
PAGE 1 OF 3

12AC6

PAGE 2

AVERAGE PLATE CHARACTERISTICS

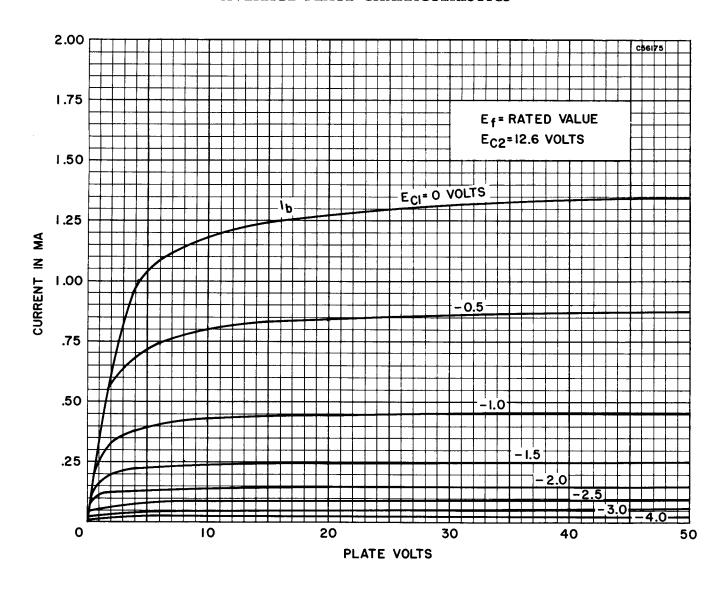

PAGE 3

AVERAGE TRANSFER CHARACTERISTICS

