



Excellence in Electronics

**TYPE
CK6281**

The CK6281 is a filament type pentode of subminiature construction designed primarily for use in resistance coupled audio frequency and direct coupled amplifiers. The tube features low battery drain, long life, small size, and low microphonic level. The flexible terminal leads may be soldered or welded directly to the terminals of circuit components without the use of sockets. Standard inline subminiature sockets may be used by cutting the leads to a suitable length.

MECHANICAL DATA

ENVELOPE: T-2 X 3 Glass ●

BASE: None (0.016" tinned flexible leads. Length: 1.5" min.
Spacing: 0.048" center-to-center)

TERMINAL CONNECTIONS: (Red dot is adjacent to lead 1)

Lead 1 Plate	Lead 4 Grid #1
Lead 2 Grid #2	Lead 5 Filament, Negative
Lead 3 Filament, Positive; Grid #3	Grid #3; Shield

MOUNTING POSITION: Any

ELECTRICAL DATA

DIRECT INTERELECTRODE CAPACITANCES: (μfds)

Grid to Plate	0.01 max.
Input	2.5
Output	3.4

RATINGS - ABSOLUTE MAXIMUM VALUES:


Filament Voltage	0.625 ± 20% volts
Plate Voltage	25 volts
Grid #2 Voltage	25 volts
Cathode Current	0.1 ma.

CHARACTERISTICS AND TYPICAL OPERATION:

Filament Voltage	0.625 volts
Filament Current	20 ma.
Plate Voltage	15 volts
Grid #2 Voltage	15 volts
Grid #1 Voltage	1.0 volts
Plate Current	50 μa .
Grid #2 Current	20 μa .
Transconductance	105 μmhos
Plate Resistance	2.0 meg.

CHARACTERISTICS AND TYPICAL OPERATION - RESISTANCE COUPLED CLASS A1 AMPLIFIER:

	First Stage		Second Stage		
Filament Voltage	0.625	0.625	0.625	0.625	volts
Filament Current	20	20	20	20	ma.
Plate and Grid #2 Supply Voltage	15	22.5	15	22.5	volts
Grid #1 Voltage	0	0	-0.625	-0.625	volts
Plate Resistor ♦	1.0	1.0	1.0	1.0	meg.
Grid #2 Resistor ♦	2.2	2.7	1.0	1.5	meg.
Average Voltage Gain (G1 to P) ▲	26:1	37:1	22:1	33:1	
Approx. Voltage Gain (G2 to P)	3:1	4:1	3:1	4:1	

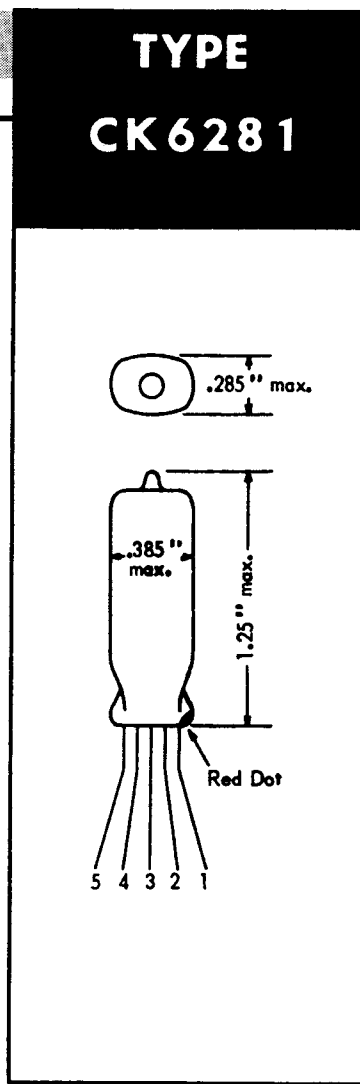

- The bulb is entirely coated with a metallic shield connected to lead 5.
- Control Grid should be returned through approximately 5 to 22 megohms to negative filament or bias voltage.
- ♦ Other plate and Grid #2 resistor values may be used to obtain less variation in voltage gain between tubes at the possible expense of less average gain.
- ▲ The values of voltage gain are quoted for a coupled load of 5 megohms, zero source impedance, and a 5 megohm grid resistor. The reactive impedances (C_{in} , C_{out} , C_{g1} , C_{g2} , CL) are of such values that they have negligible effect upon the gain.

Tentative Data


RAYTHEON MANUFACTURING COMPANY

RECEIVING TUBE AND SEMICONDUCTOR OPERATIONS



SUBMINIATURE PENTODE

AVERAGE PLATE CHARACTERISTICS
(Triode Connected)

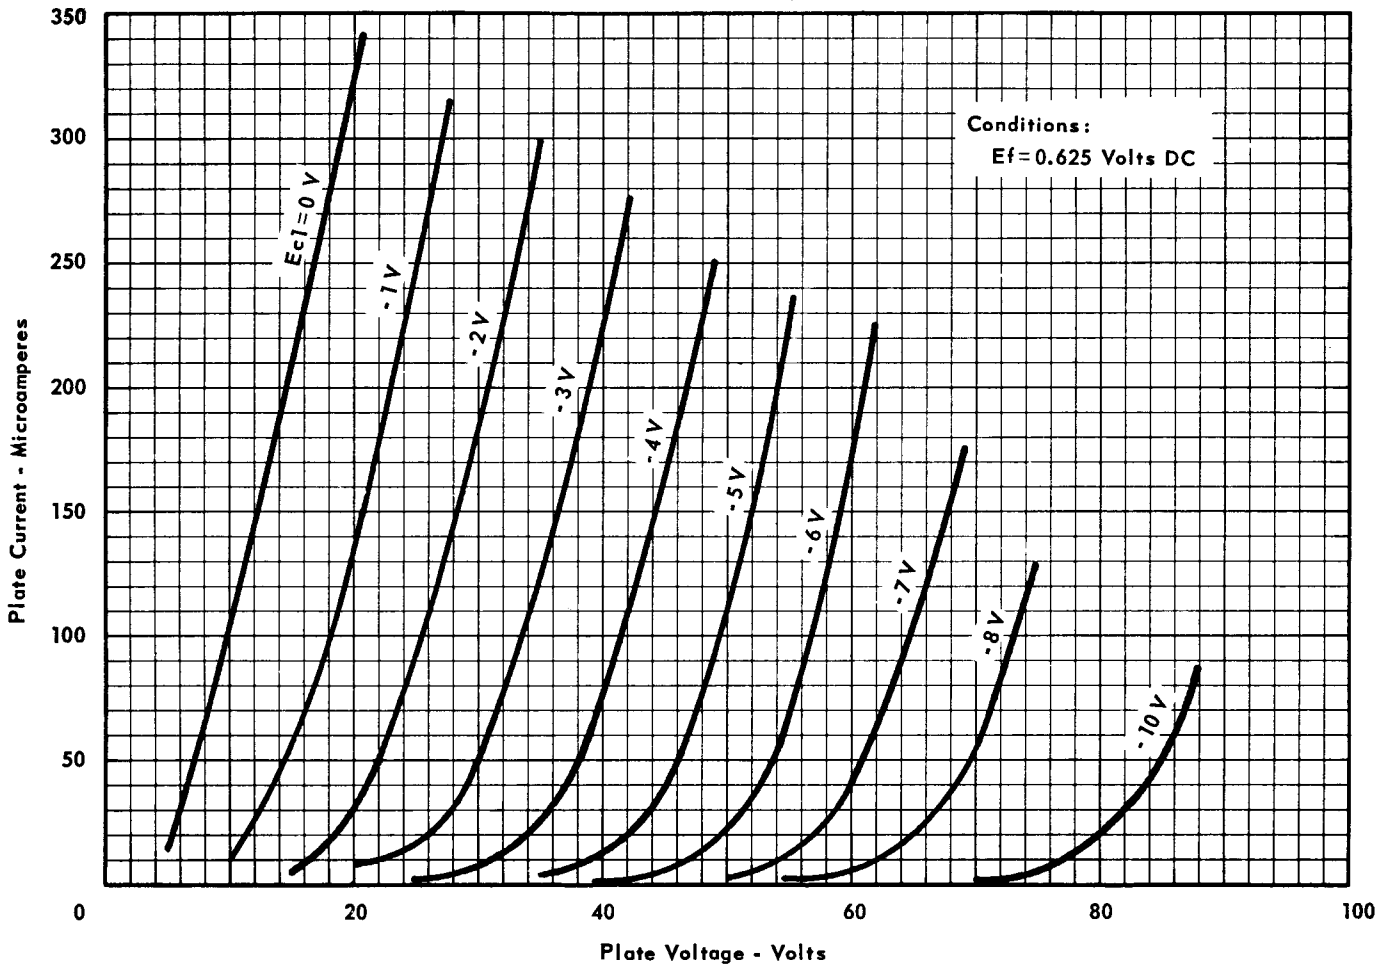

RAYTHEON MANUFACTURING COMPANY

RECEIVING TUBE AND SEMICONDUCTOR OPERATIONS



SUBMINIATURE PENTODE

AVERAGE PLATE CHARACTERISTICS

