

16 INCH, RECTANGULAR, GLASS

FACE PLATE -- SPHERICAL GRAY

FOCUS -- ELECTROSTATIC

INTEGRAL PLASTIC IMPLOSION BARRIER

DEFLECTION -- MAGNETIC

ALUMINIZED SCREEN

114 DEGREE DEFLECTION

EXTERNAL CONDUCTIVE COATING

MEDIUM GRID NO. 2 VOLTAGE TYPE
FOR CATHODE-DRIVE OPERATION

-----DESCRIPTION AND RATING-----

The 16AWP4 is a 16 inch electrostatic-focus and magnetic deflection glass light-weight picture tube employing an integral plastic implosion barrier. Other outstanding features include a short over-all length, a small neck diameter and a non-ion trap gun designed for operation at a medium Grid No. 2 voltage for use in cathode-drive circuits. The fluorescent screen is aluminized to increase light output and reduce undesirable screen charging. An external conductive coating is provided to serve as a filter capacitor when grounded.

ELECTRICAL DATA

Focusing Method	Electrostatic
Deflection Angle, Approximate	
Horizontal	102 degrees
Vertical	84 degrees
Diagonal	114 degrees
Direct Interelectrode Capacitance	
Cathode to all other electrodes, approx.	5 uuf
Grid #1 to all other electrodes, approx.	6 uuf
External Conductive Coating to Anode	1500 max. uuf 1000 min. uuf
Heater Current at 6.3 volts	300 \pm 15 ma.
Heater Warm-Up Time	18 sec.

OPTICAL DATA

Phosphor Number	P4 Aluminized
Light Transmittance at Center (Approximate)	48 Percent

CATHODE RAY TUBE DEPARTMENT

GENERAL  ELECTRIC

Syracuse, N. Y.

MECHANICAL DATA

Overall 10 1/8 ± 1/4 inches
Greatest Dimensions of Tube
 Diagonal. 15 11/16 + 5/32 inches

 Width 13 3/4 ± 1/8 inches
 Height. 11 5/32 ± 1/8 inches
Minimum Useful Screen Dimensions (Projected)
 Diagonal. 14 7/8 inches
 Horizontal Axis 12 15/16 inches
 Vertical Axis 10 1/4 inches
 Area 125 sq. inches
Neck Length 4 ± 1/8 inches
Bulb J125A1
Bulb Contact. JEDEC No. J1-21
Base JEDEC No. B7-237 or B7-208
Basing. 8HR
Bulb Contact Alignment
 Anode Contact Aligns with Base Pin No. 4 ± 30 degrees

RATINGS (Design Maximum System)

Unless otherwise specified, voltage values are positive and measured with respect to Grid No. 1.

Maximum Anode Voltage 18,000 volts
Minimum Anode Voltage 11,000 volts
Maximum Grid #4 (Focusing Electrode) Voltage. -500 to +1000 volts
Minimum Grid #2 Voltage 100 volts
Maximum Grid #2 Voltage 300 volts
Cathode Voltage
 Maximum Positive Value. 140 volts DC
 Maximum Positive Peak Value 200 volts
 Maximum Negative Value. 0 volts DC
 Maximum Negative Peak Value 2 volts
Maximum Heater Voltage. 6.9 volts
Minimum Heater Voltage. 5.7 Volts
Maximum Heater-Cathode Voltage
 Heater Negative with respect to Cathode
 During Warm-Up period not to exceed 45 sec. 410 volts
 After equipment warm-up period. 180 volts
Heater Positive With Respect to Cathode 180 volts

TYPICAL OPERATING CONDITIONS (Cathode-Drive Service)

Anode Voltage 15,000 volts DC
Grid #4 Voltage (Focusing Electrode, Notes 2 & 3). . . 250 volts DC
Grid #2 Voltage 150 volts DC
Cathode to Grid #1 Voltage for cut-off (Note 1) . . 31 to 49 volts

MAXIMUM CIRCUIT VALUES

Maximum Grid #1 Circuit Resistance 1.5 max. megohm
Grid No. 2 Circuit Resistance 0.1 min. megohm
Focusing Electrode Circuit Resistance 0.1 min. megohm

Protective resistance in Grid No. 2 and focusing electrical circuits is advisable to prevent damage to tube. If applicable, one resistor common to both circuits may be used.

NOTES:

1. Visual extinction of focused raster.
2. With the combined Grid #1 bias voltage and video-signal voltage adjusted to give an anode current of 150 ua on a 12-15/16" x 10-1/4" pattern from RCA 2F21 monoscope or equivalent.
3. Individual tubes will have satisfactory focus at some value between 0 and 500 volts.


CATHODE RAY TUBE DEPARTMENT

GENERAL  ELECTRIC


Syracuse, N. Y.

16 AWP4

SCREEN DIMENSIONS
 DIAGONAL — $14\frac{7}{8}$
 WIDTH — $12\frac{15}{16}$
 HEIGHT — $10\frac{1}{4}$
 AREA — 125 SQ. IN.

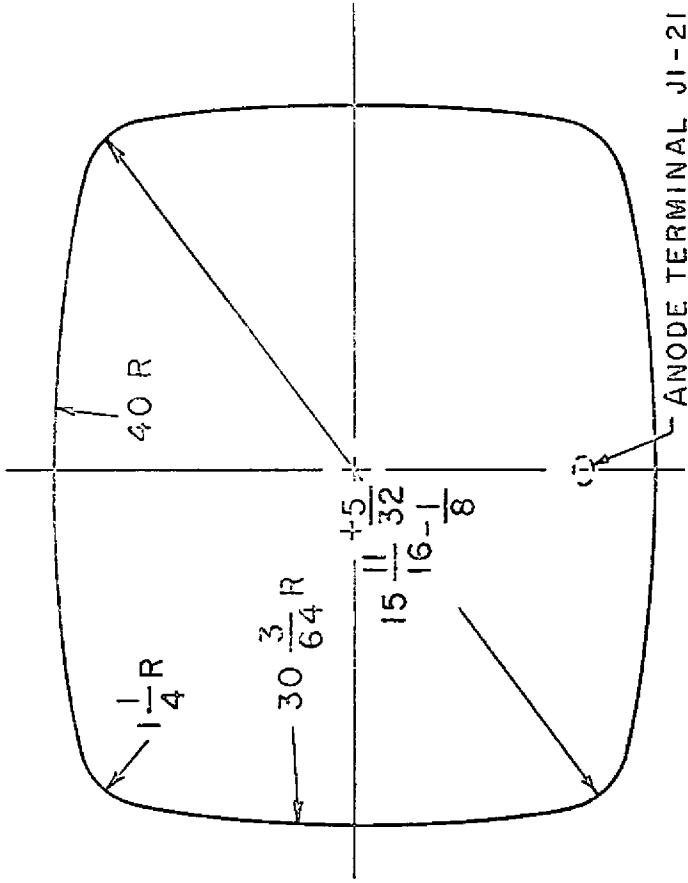


PLASTIC IMPLOSION BARRIER

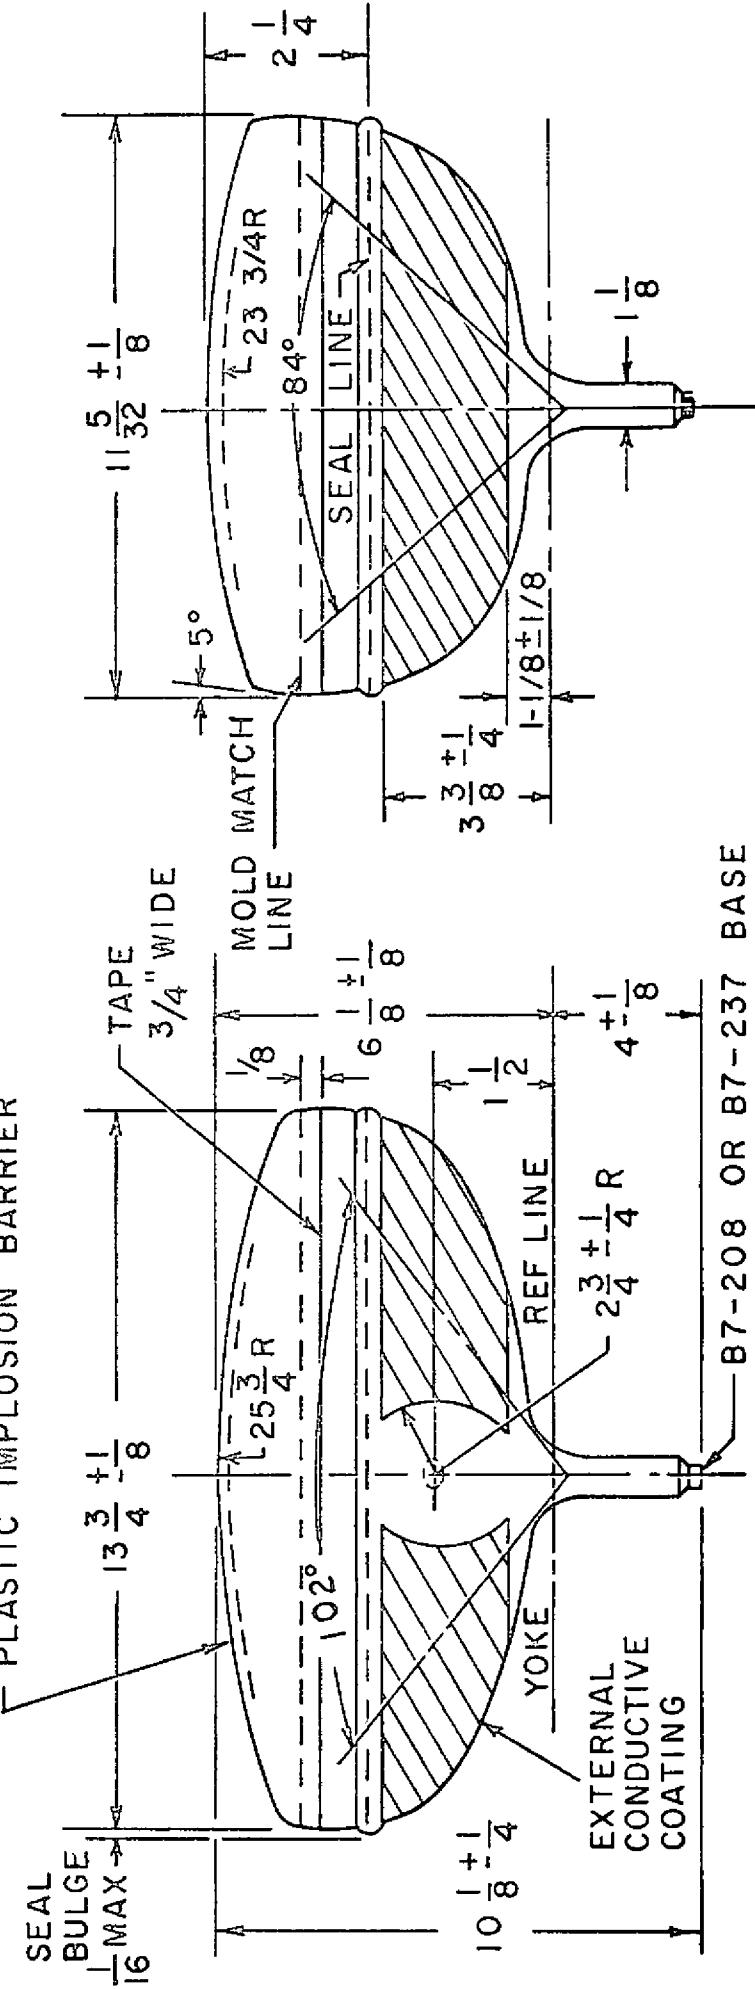

OUTLINE NOTES

1. The reference line is determined by the intersection of the plane C-C of gage (EIA No. 126) with the glass funnel.
2. Deflection angle on the diagonal is
3. Anode terminal aligns with pin no. 4 ± 30 degrees.
4. Use a non-rigidly mounted socket with flexible leads. Bottom circumference of base wafer will fall within 1-3/4 inch diameter circle concentric with the bulb axis.

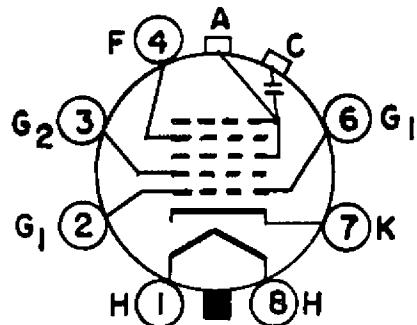

BASING DIAGRAM
8 HR

CATHODE RAY TUBE DEPARTMENT

GENERAL  **ELECTRIC**
Syracuse, N. Y.