

16AZP4
Page 1
6-19-63

16AZP4
CATHODE RAY TUBE

16 INCH, RECTANGULAR, GLASS

FACE PLATE -- SPHERICAL GRAY

FOCUS -- ELECTROSTATIC

INTEGRAL PLASTIC IMPLOSION BARRIER

DEFLECTION -- MAGNETIC

ALUMINIZED SCREEN

114 DEGREE DEFLECTION

EXTERNAL CONDUCTIVE COATING

-----DESCRIPTION AND RATING-----

The 16AZP4 is a 16 inch electrostatic focus and magnetic deflection glass light-weight picture tube employing an integral plastic implosion barrier. Other outstanding features include a short over-all length, a small neck diameter and a non-ion trap gun designed for operation at an intermediate Grid No. 2 voltage for use in cathode-drive circuits. The fluorescent screen is aluminized to increase light output and reduce undesirable screen charging. An external conductive coating is provided to serve as a filter capacitor when grounded.

ELECTRICAL DATA

Focusing Method	Electrostatic
Deflection Angle, Approximate	
Horizontal	102 degrees
Vertical	84 degrees
Diagonal	114 degrees
Direct Interelectrode Capacitance	
Cathode to all other electrodes, approx.	5 μuf
Grid #1 to all other electrodes, approx.	6 μuf
External Conductive Coating to Anode	1500 max. μuf 1000 min. μuf
Heater Current at 6.3 volts	450 - 23 ma.
Heater Warm-up time	11 sec.

OPTICAL DATA

Phosphor Number	P4 Aluminized
Light transmittance at center (Approximate)48 Percent

CATHODE RAY TUBE OPERATION

GENERAL  ELECTRIC

Syracuse, N. Y.

MECHANICAL DATA

Overall Length	10-3/8 + 1/4 inches
Greatest Dimensions of Tube	
Diagonal	15-11/16 + 5/32 inches
	- 1/8
Width	13-3/4 + 1/8 inches
Height	11-5/32 + 1/8 inches
Minimum Useful Screen Dimensions (Projected)	
Diagonal	14-7/8 inches
Horizontal Axis	12-15/16 inches
Vertical Axis	10-1/4 inches
Area	125 sq. inches
Neck Length	4-1/4 - 1/8 inches
Bulb	J125A1
Bulb Contact	JEDEC No. J1-21
Base	JEDEC No. B7-237 or B7-208
Basing	8HR
Bulb Contact Alignment	
Anode Contact Aligns with Base Pin No. 4	+ 30 degrees

RATINGS (Design Maximum System)

Unless otherwise specified, voltage values are positive and measured with respect to Grid No. 1.

Maximum Anode Voltage	18,000 volts
Minimum Anode Voltage	11,000 volts
Maximum Grid #4 (Focusing Electrode) Voltage	-500 to +1000 volts
Minimum Grid #2 Voltage	100 volts
Maximum Grid #2 Voltage	250 volts
Cathode Voltage	
Maximum Positive Value	140 volts DC
Maximum Positive Peak Value	200 volts
Maximum Negative Value	0 volt d DC
Maximum Negative Peak Value	-2 volts
Maximum Heater Voltage	6.9 volts
Minimum Heater Voltage	5.7 volts
Maximum Heater-Cathode Voltage	
Heater Negative with respect to Cathode	
During Warm-up period not to exceed 15 sec.	.410 volts
After equipment warm-up period	.180 volts
Heater Positive with Respect to Cathode180 volts

TYPICAL OPERATING CONDITIONS (Cathode-Drive Service)

Anode Voltage	15,000 volts DC
Grid #4 Voltage (Focusing Electrode, Notes 2 & 3)	250 volts DC
Grid #2 Voltage	150 volts DC
Cathode to Grid #1 Voltage for cut-off (Note 1)31 to 49 volts

MAXIMUM CIRCUIT VALUES

Maximum Grid #1 Circuit Resistance 1.5 max. megohm
Grid #2 Circuit Resistance 0.1 min. megohm
Focusing Electrode Circuit Resistance 0.1 min. megohm

Protective resistance in Grid No. 2 and focusing electrical circuits is advisable to prevent damage to tube. If applicable, one resistor common to both circuits may be used.

NOTES:

1. Visual extinction of focused raster.
2. With the combined Grid #1 bias voltage and video-signal voltage adjusted to give an anode current of 150 μ a on a 12-15/16" x 10-1/4" pattern from RCA 2F21 monoscope or equivalent.
3. Individual tubes will have satisfactory focus at some value between 0 and 400 volts.


CATHODE RAY TUBE OPERATION

GENERAL  ELECTRIC


Syracuse, N. Y.

16AZP4

SCREEN DIMENSIONS
 DIAGONAL — 14 7/8
 WIDTH — 12 15/16
 HEIGHT — 10 1/4
 AREA — 125 SQ. IN.

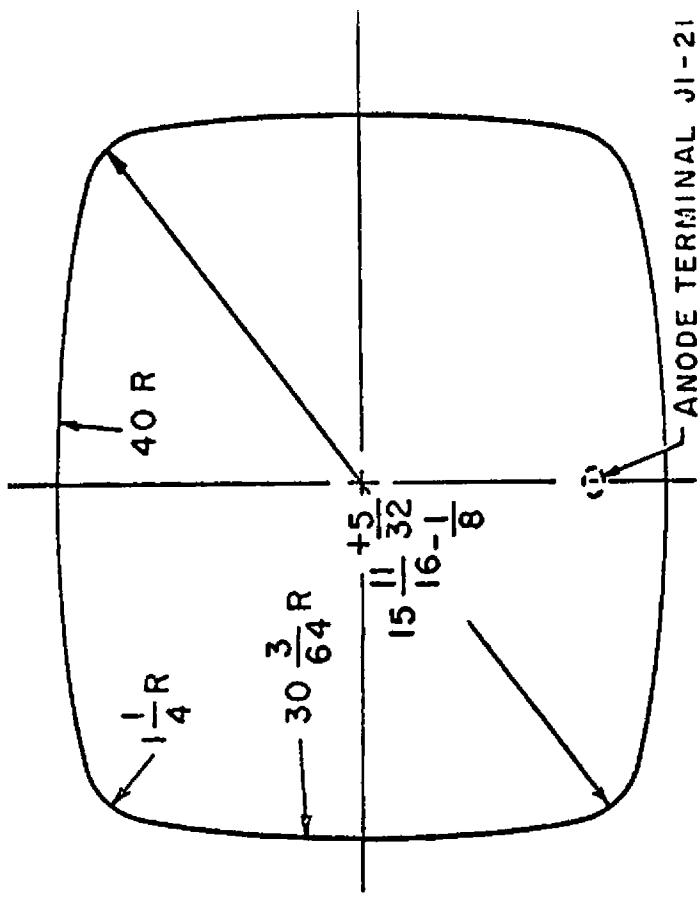


PLASTIC IMPLOSION BARRIER

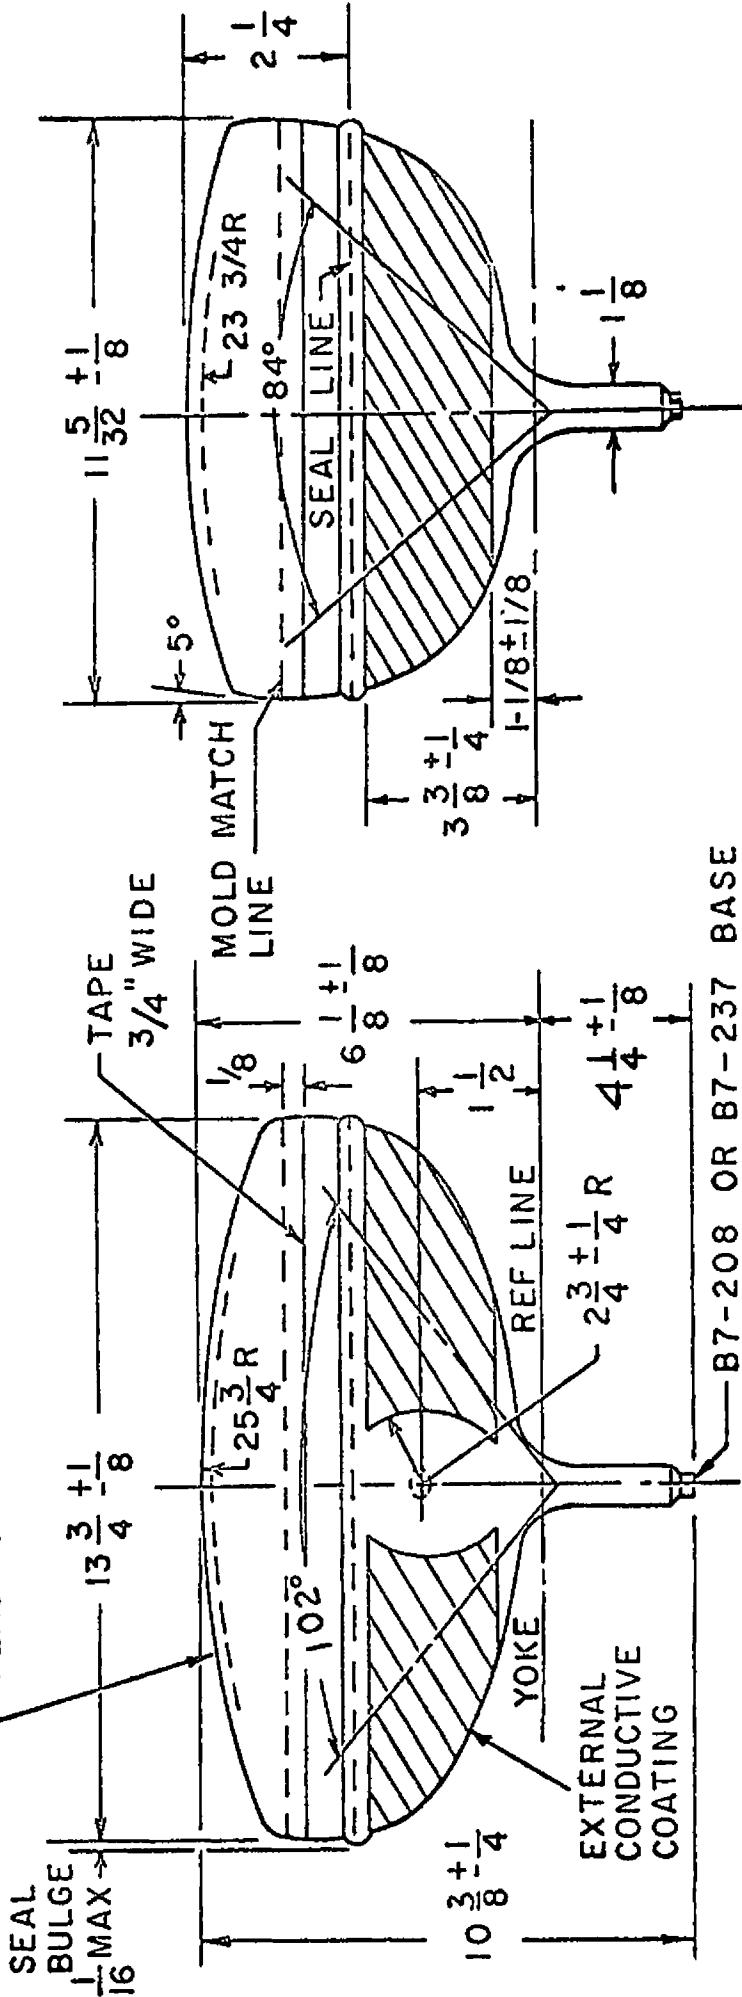

16AZP4
Page 5
4-10-63

OUTLINE NOTES

1. The reference line is determined by the intersection of the plane C-C of gage (EIA No. 126) with the glass funnel.
2. Deflection angle on the diagonal is 114° .
3. Anode terminal aligns with pin no. 4 ± 30 degrees.
4. Use a non-rigidly mounted socket with flexible leads. Bottom circumference of base wafer will fall within 1-3/4 inch diameter circle concentric with the bulb axis.

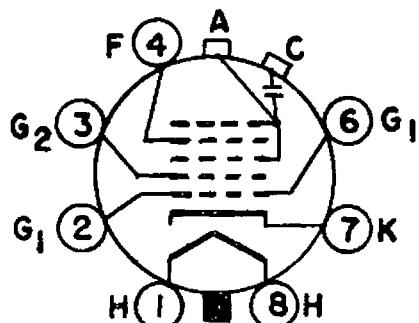

BASING DIAGRAM
8 HR

CATHODE RAY TUBE DEPARTMENT
GENERAL  ELECTRIC
Syracuse, N. Y.