


TUNG-SOL

BEAM PENTODE

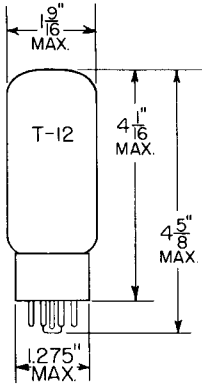

GLASS BULB


COATED UNIPOTENTIAL CATHODE

HEATER

25 VOLTS 0.3 AMP.

AC OR DC

ANY MOUNTING POSITION



BOTTOM VIEW

SHORT MEDIUM SHELL
7 PIN OCTAL

75

THE 25C6GA IS A BEAM POWER AMPLIFIER HAVING HIGH POWER SENSITIVITY AND HIGH POWER OUTPUT AT COMPARATIVELY LOW DC SUPPLY VOLTAGES. EXCEPT FOR HEATER RATINGS, THE 25C6GA IS IDENTICAL TO THE 50C6GA.

RATINGS

INTERPRETED ACCORDING TO DESIGN CENTER SYSTEM

HEATER VOLTAGE	25	VOLTS
MAXIMUM HEATER-CATHODE VOLTAGE:		
HEATER NEGATIVE WITH RESPECT TO CATHODE	180	VOLTS
HEATER POSITIVE WITH RESPECT TO CATHODE	180	VOLTS
MAXIMUM PLATE VOLTAGE	200	VOLTS
MAXIMUM GRID #2 SUPPLY VOLTAGE	200	VOLTS
MAXIMUM GRID #2 VOLTAGE	SEE RATING CHART	
MAXIMUM PLATE DISSIPATION	12.5	WATTS
MAXIMUM GRID #2 DISSIPATION	1.75	WATTS
MAXIMUM GRID #1 CIRCUIT RESISTANCE:		
FIXED BIAS	0.1	MEGOHM
SELF BIAS	0.5	MEGOHM

CONTINUED ON FOLLOWING PAGE

PRINTED IN U.S.A.


TUNG-SOL



CONTINUED FROM PRECEDING PAGE

TYPICAL OPERATING CONDITIONS AND CHARACTERISTICS

CLASS A_1 AMPLIFIER

HEATER VOLTAGE		25	VOLTS
HEATER CURRENT		0.3	AMP.
PLATE VOLTAGE	135	200	VOLTS
GRID #2 VOLTAGE	135	135	VOLTS
GRID #1 VOLTAGE	-13.5	-14	VOLTS
PEAK AF GRID #1 VOLTAGE	13.5	14	VOLTS
ZERO SIGNAL PLATE CURRENT	58	61	MA.
MAXIMUM SIGNAL PLATE CURRENT	60	66	MA.
ZERO SIGNAL GRID #2 CURRENT	3.5	2.2	MA.
MAXIMUM SIGNAL GRID #2 CURRENT	11.5	9	MA.
TRANSCONDUCTANCE	7 000	7 100	μ MHOS
PLATE RESISTANCE (APPROX.)	9 300	18 300	OHMS
LOAD RESISTANCE	2 000	2 600	OHMS
MAXIMUM SIGNAL POWER OUTPUT	3.6	6	WATTS
TOTAL HARMONIC DISTORTION (APPROX.)	10	10	PERCENT

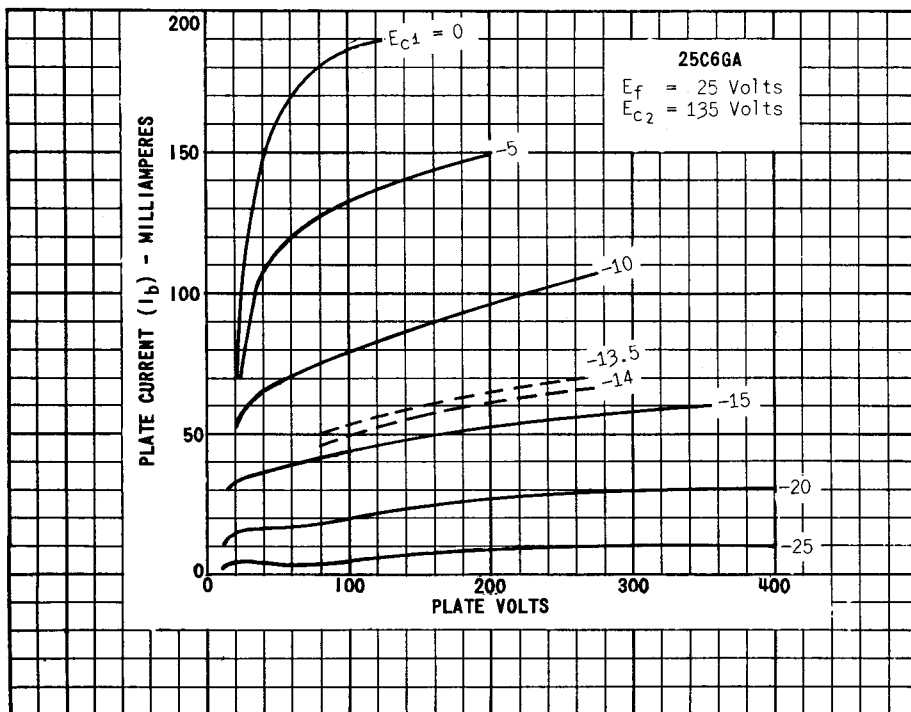

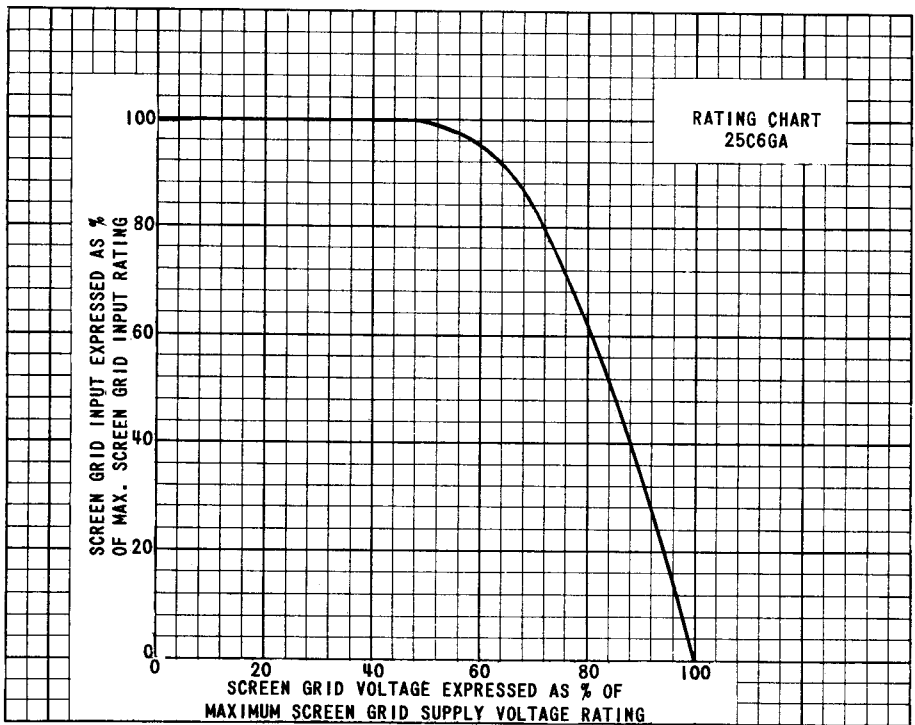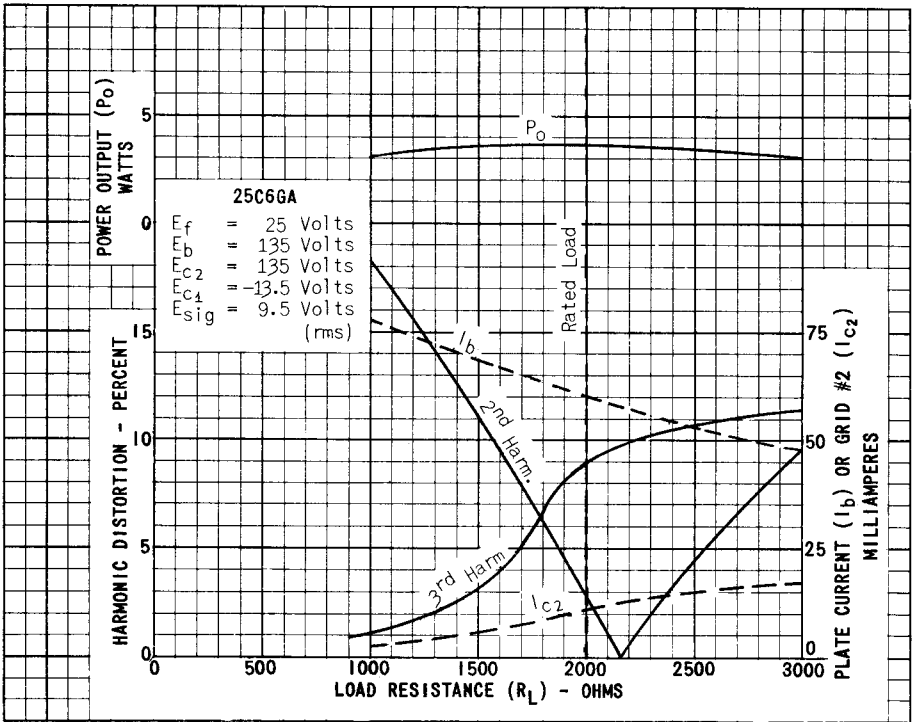

PRINTED IN U. S. A.