DIAMETER 5" NOMINAL

5EB2P

SEB 20

Oscilloscope Tube


ELECTROSTATIC FOCUS. ELECTROSTATIC DEFLECTION.

DATA

	\mathbf{D}_{ℓ}	ATA		
GENERAL:				
Heater: Voltage .	6	5.3 .		. a.c. or d.c. volts.
Current .	0).6 .		. amp.
Direct Inter-electrode Capacitances:				
Modulator to all otl	ner electr	odes		. 12.0μμf.
Each X Plate to all	other ele	ctrodes		. 5.0μμf.
Each Y Plate to all				$5.0\mu\mu f.$
Deflector Plates X1 Deflector Plates Y1	to X2			. 2.3μμf.
Deflector Plates Y1	to Y2			$2.3\mu\mu f$.
Screen:				
Fluorescence .				. Blue.
Persistence .			•	. Very Short
				of initial brightness).
Focussing Method . Deflecting Method .				. Electrostatic.
Deflecting Method .			•	. Electrostatic.
Overall Length			•	. 425 ± 9 mm.
Overall Length Greatest Diameter of Bu Minimum Useful Screen	lb .		•	. 136.5 mm.
Millimin Oseiui Scieen	Diamete	71 .	•	. 114 mm.
Mounting Position .			•	. Any.
Anode Cap Base	 		•	English BSS448/CT2.11 Pin Magnal.
Base	•		•	. II Pin Magnal.
Pin 1—Heater. Pin 2—No connection. Pin 3—No connection. Pin 4—Anode 2. Pin 5—No connection. Pin 6—No connection.	3 = 2	7	(a) (b)	Pin 7—Anode 1 and Anode 3. Pin 8—No connection. Pin 9—No connection. Pin 10—Modulator. Pin 11—Heater and Cathode. Cap—Anode 4 P.D.A. BSS448/CT1 caps on neck connect to X1, X2, Y1 and Y2.
Anode 1 and 3 (2500 vol.) Anode 2 Anode 4 (5000 volts max	lts max.)	: :		. 2000 volts. 450/570 volts.
Anode 4 (5000 volts max	(.) .	• •		. 4000 volts.
Modulator volts for cut-	OII .		•	105 volts max.
Deflection Sensitivity:				
V Dlata				mm./volt.
X Plate V Plate	•	• •	•	0.22 to 0.33

. 0.22 to 0.33

X Plate . Y Plate .

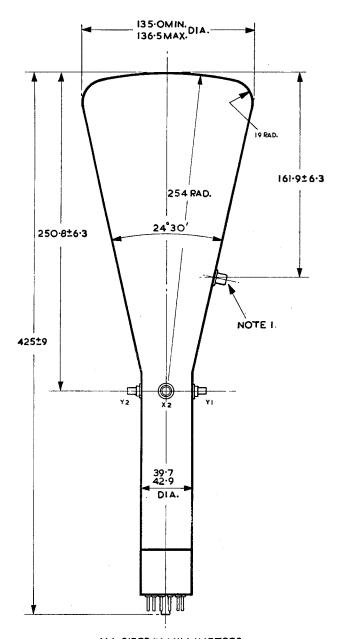

ALL SIZES IN MILLIMETRES.

- Note 1. The angle between the trace produced by Y1, Y2 and a plane through the tube axis, spigot key and the P.D.A. Cap, may vary by an angular tolerance of 10°. The spigot key is on the same side of the tubes as the P.D.A. Cap.
- Note 2. The angle between the trace produced by X1 and X2 and the trace produced by Y1 and Y2 is $90^{\circ} \pm 3^{\circ}$.
- Note 3. The undeflected focused spot will fall within a circle having a 7 m.m. radius concentric with the centre of the tube face.
- Note 4. When viewing the screen with the tube positioned such that the spigot key is uppermost, a positive voltage applied to the terminal X1 will deflect the spot to the left and a positive voltage applied to the terminal Y1 will deflect the spot upwards.