



T.	Image 1	Image 2	$U_f$	$I_f$	$U_a$	$U_g$	$I_a$	$S$	$\mu$	$R_i$	$R_o$	$P_o$	$h$	$P_a$
			V	A	V	V	mA	mA/V	V/V	k $\Omega$	k $\Omega$	W	%	W
3 A/104 B	STCE	1	4,5	1	130	-20	25	1,1	2,3	2	2	0,135	5	5
3 A/144 A	STCE	2	4,5	1	160	-30	29			1,9	1,9	0,3		
18004	Phi	2	4,4	0,97	190		maximum ( $I_k = 60$ mA)							
104 D	WE	2	4,2	1	130	-20	25	1,18	2,5	2,1		0,16		

1) vide \*4





3A/104B



3A/144A

**Equivalentents**

TS 7	Phi	=	18004
3 A/144 AY	STCE	=	3 A/144 A
104 A	WE	=	104 D
104 DW	WE	=	104 D
210 A	WE	=	104 D
4104 D	STCE	=	104 D

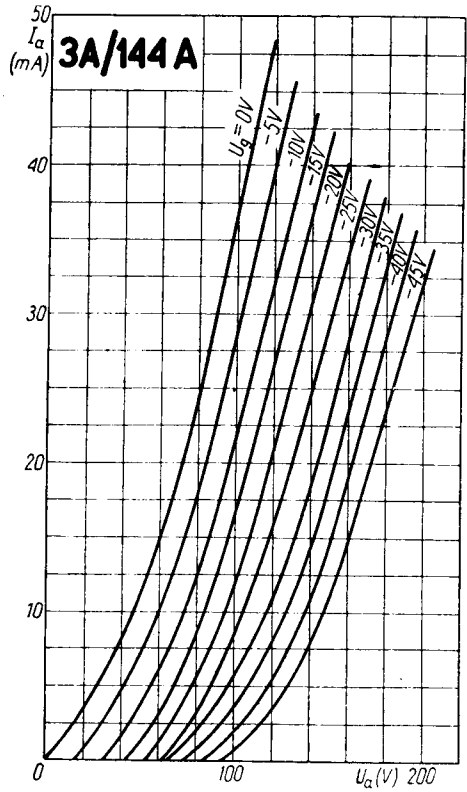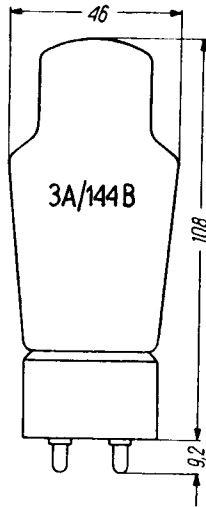

T.	$C_{ag}$	$C_{g1f}$	$C_{af}$
	pF	pF	pF
3 A/144 A	6,8	5,8	5,5
18004	2,5	2,9	4,5