

engineering data service

12AL8

ADVANCE DATA

MECHANICAL DATA

Bulb	T-6 1/2
Base	E9-1, Miniature Button 9-Pin
Outline	6-3
Basing	9GS
Cathode	Coated Unipotential
Mounting Position	Any

ELECTRICAL DATA

HEATER CHARACTERISTICS

Heater Voltage ¹	12.6	Volts
Heater Current	550	Ma
Heater-Cathode Voltage (Design Center Values)		
Heater Negative with Respect to Cathode	30	Volts
Heater Positive with Respect to Cathode	30	Volts

DIRECT INTERELECTRODE CAPACITANCES (Unshielded)

Triode Section			
Grid to Plate	5.7	μ uf	
Input: g to (k + h)	1.8	μ uf	
Output: p to (k + h)	0.4	μ uf	
Tetrode Section			
Grid No. 2 to Plate	14	μ uf	
Input: g ₂ to (g ₁ + k + h)	13	μ uf	
Output: p to (g ₁ + k + h)	1.6	μ uf	
Coupling: (tetrode g ₂ to triode g ₁)	0.01	μ uf	Max.



RATINGS (Design Center Values)

	Triode Section	Tetrode Section	
Plate Voltage	30	30	Volts Max.
Positive Grid No. 1 Voltage, Abs. Max. (Space Charge Grid)		16	Volts Max.
Negative Grid No. 2 Voltage		20	Volts Max.
Cathode Current	20		Ma Max.
Grid Circuit Resistance	10		Megohms Max.
Grid No. 2 Circuit Resistance		10	Megohms Max.

QUICK REFERENCE DATA

The Sylvania Type 12AL8 is a medium mu triode and space-charge grid tetrode with independent cathodes. The triode section is intended for use as a voltage amplifier and the tetrode section is intended for use as an audio power amplifier driver.

It is designed for operation where the heater, plate and screen voltages are obtained directly from a 12 volt automotive storage battery.

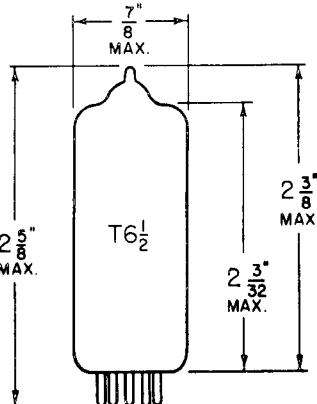

SYLVANIA ELECTRIC
PRODUCTS INC.

RADIO TUBE DIVISION
EMPORIUM, PA.

Prepared and Released By The
TECHNICAL PUBLICATIONS SECTION
EMPORIUM, PENNSYLVANIA

October 2, 1957-RL

Page 1 of 3

SYLVANIA

12AL8

Page 2

CHARACTERISTICS AND TYPICAL OPERATION

Class A₁ Amplifier

	Triode Section	Tetrode Section	
Plate Voltage	12.6	12.6	Volts
Grid No. 1 Voltage (Space-Charge Grid)		12.6	Volts
Grid Voltage ²	-0.9	0.5 ³	Volts
Plate Current	0.5	40	Ma
Grid No. 1 Current (Space-Charge Grid)		75	Ma
Transconductance	1000	15000 ⁴	Mhos
Amplification Factor	13	7.2 ⁴	
Plate Resistance	13000	480	Ohms

Resistance-Coupled Cascaded Amplifier (See Circuit)

	Triode Section	Tetrode Section	
Plate Voltage		12.6	Volts
Plate Supply Voltage	12.6		Volts
Grid No. 1 Voltage (Space-Charge Grid)		12.6	Volts
Grid Resistor ²	2.2	2.2	Megohms
Grid Blocking Capacitor	0.1	0.1	μf
AF Grid Voltage	0.18		Volts
Plate Current		8.0 ⁵	Ma
Grid No. 1 Current (Space-Charge Grid)		75	Ma
Load Resistance	330K	800	Ohms
Power Output		40	Mw
Total Harmonic Distortion		10	Percent

NOTES:

1. This tube is intended for use in automobile radios operated from a nominal 12 volt battery. Design of the tube is such that the heater will operate satisfactorily over the range 10.0 volts to 15.9 volts, and that the maximum ratings provide a safety factor for the wide voltage variation encountered with this type of supply.
2. Average contact potential developed across a 2.2 megohms resistor.
3. Grid No. 2 being the control grid.
4. From Grid No. 2 to plate.
5. Zero-signal plate current is approximately 40 ma.

RESISTANCE COUPLED CASCADeD AMPLIFIER CIRCUIT

