



PHOTOTUBE

DESCRIPTION

The GL-918 is a two-electrode, gas-filled phototube and is designed for use in measurement and relay applications. The S-1 photosurface

used in this tube has a high sensitivity to red radiation and is designed particularly for use where the illumination on the phototube is low.

TECHNICAL INFORMATION

These data are for reference only. For design information refer to specifications.

GENERAL CHARACTERISTICS

Number of electrodes 2

Electrical

Spectral response	S-1	
Luminous sensitivity at 90 volts, 0 cycle	150	microamperes per lumen
Maximum gas amplification	10.5	
Interelectrode capacitance	3.0	micromicrofarads
Maximum dark current at 90 volts	0.1	microampere
Wavelength of maximum response	8000	angstroms
Sensitivity at maximum response	0.0145	microampere per microwatt




TECHNICAL INFORMATION (CONT'D)

Mechanical


Window dimensions	$\frac{11}{16} \times 1\frac{5}{8}$ inches
Seated height to center of useful cathode area	$2\frac{1}{8} \pm \frac{3}{32}$ inches
Maximum over-all height	$4\frac{1}{8}$ inches
Maximum seated height	$3\frac{1}{2}$ inches
Maximum diameter	$1\frac{3}{16}$ inches
Base	M8-074
Mounting position	Any
Net weight, approx.	$\frac{1}{2}$ ounce
Shipping weight, approx.	3 pounds

MAXIMUM RATINGS

Anode voltage, d-c or peak a-c	100 volts
Cathode current density	102 microamperes per square inch
Ambient temperature	100 centigrade

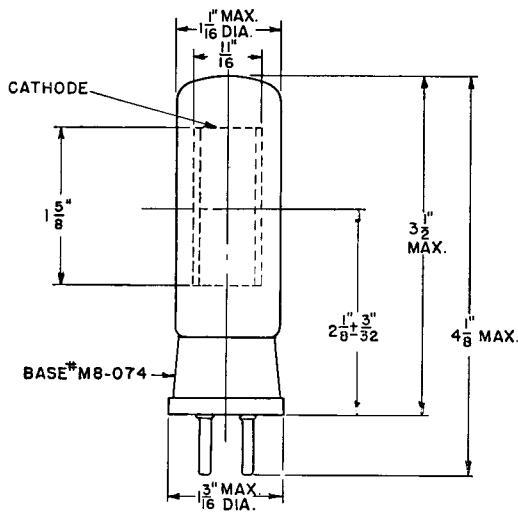

OUTLINE
 GL-918 PHOTOTUBE
 K-8639391 8-10-44

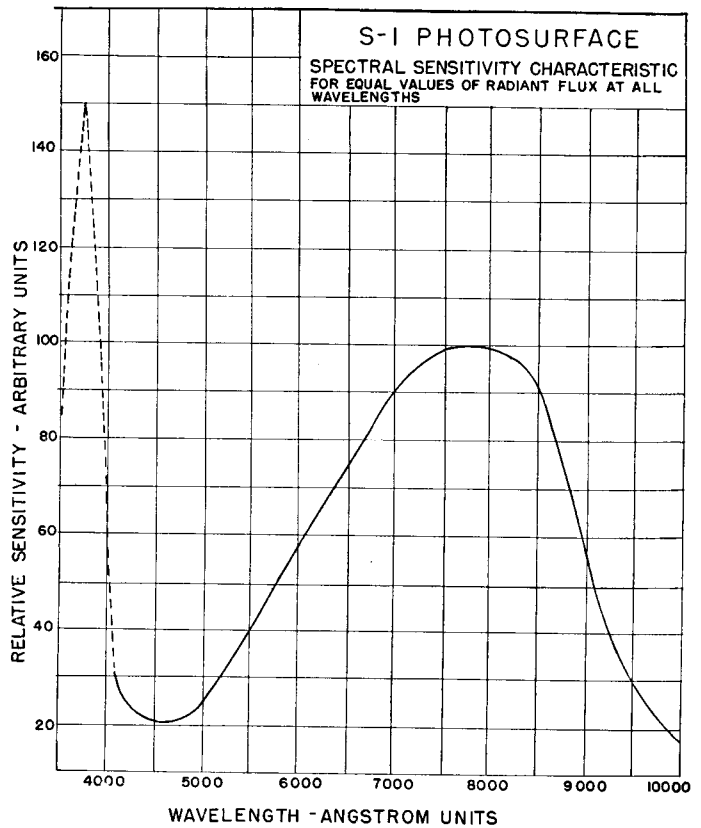

K-8639626

4-17-44