

HALF WAVE RECTIFIER

CY31

Indirectly-heated power rectifier for
D.C./A.C. mains-operated equipment.

HEATER

This valve is suitable for DC/AC operation.

V_h	20	V
I_h	0.2	A
Heating time	70	secs



OPERATING CONDITIONS

Max. anode voltage	250 V.rms
Max. rectified current	120 mA
Max. voltage, heater to cathode	350 Vpk


Max. Capacitance of Reservoir Condenser (μF)	Limiting Resistance in Series with anode (ohms)
8.0	0
16.0	75
32.0	125

DIMENSIONS

ARRANGEMENT OF ELECTRODES AND BASE CONNECTIONS

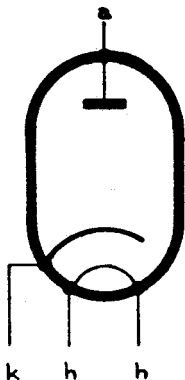

OCTAL BASE

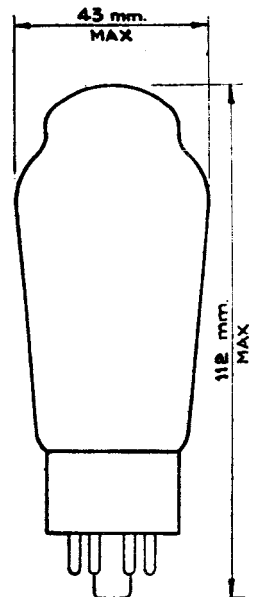

CY31

HALF WAVE RECTIFIER

Indirectly-heated power rectifier for D.C./A.C. mains-operated equipment.

