

Twin triode with separate cathodes suitable for use in amplifier, mixer, oscillator and multivibrator circuits. Useful frequency range extends from low frequencies to about 800 Mc.

*COLD CAPACITANCES (without external shield)*

Input, Each Section*	2.2	$\mu\mu F$
Output, Section 1*	1.0	$\mu\mu F$
Output, Section 2*	1.0	$\mu\mu F$
Plate to Grid, Each Section*	1.3	$\mu\mu F$
Plate to Plate, nominal	.05	$\mu\mu F$
Plate to Plate, maximum	.1	$\mu\mu F$

*ABSOLUTE MAXIMUM RATINGS (each section)*

Plate Voltage	330	volts
Grid Voltage, positive value	+ 5	volts
Grid Voltage, negative value	- 50	volts
Cathode Current	20	ma
Plate Dissipation	1.6	watts
Heater — Cathode Voltage	130	volts
Bulb Temperature, at hottest point	160	°C
Grid Circuit Resistance		
with fixed bias	1	Mohm
with cathode bias	2	Mohms

\* Measured with internal shield and heater connected to cathode of section. Elements of other section grounded.



**MECHANICAL DATA**

Base: Small Button Noval 9-pin,  
RETMA E9-1

Bulb: EIA T 6½

Mounting Position: Any

PIN NO	CONNECTED TO
1.	Heater
2.	Cathode of Section 1
3.	Grid of Section 1
4.	Plate of Section 1
5.	Shield and Heater Tap
6.	Plate of Section 2
7.	Grid of Section 2
8.	Cathode of Section 2
9.	Heater

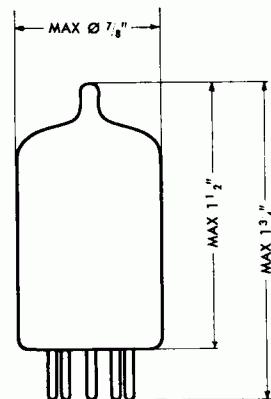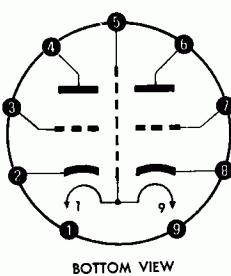

# 407A TWIN TRIODE



## TYPICAL OPERATION. CLASS A<sub>1</sub>. (each section)



Heater Voltage (Pins 1 & 9 to Pin 5) . . . . .	20.0	20.0	volts
Heater Current . . . . .	.1	.1	amp
Heater Voltage (Pin 1 to Pin 9) . . . . .	40.0	40.0	volts
Heater Current . . . . .	.05	.05	amp
Plate Supply Voltage . . . . .	130	150	volts
Cathode Bias Resistor . . . . .	200	240	ohms
Plate Current . . . . .	7.6	8.2	ma
Transconductance . . . . .	5400	5500	$\mu$ mhos
Amplification Factor . . . . .	35	35	
Plate Resistance . . . . .	6500	6400	ohms
Grid Voltage for Plate Current = 10 $\mu$ a . . . . .	— 6	— 7	volts
Equivalent Noise Resistance . . . . .	500	500	ohms
Input Conductance at 100 Mc . . . . .	130	130	$\mu$ mhos

## TYPICAL OPERATION. CLASS AB<sub>1</sub>

Plate Supply Voltage . . . . .	300	volts
Cathode Bias Resistor . . . . .	800	ohms
RMS AF Grid to Grid Voltage . . . . .	14	volts
Zero Signal Plate Current, Each Section . . . . .	4.9	ma
Max. Signal Plate Current, Each Section . . . . .	6.3	ma
Load Impedance, Plate to Plate . . . . .	40,000	ohms
Total Harmonic Distortion . . . . .	10	%
Max. Signal Power Output . . . . .	1.0	watt

## OPERATION RANGE VALUES (each section)

Heater Voltage . . . . .	20.0	volts	
Plate Supply Voltage . . . . .	150	volts	
Cathode Bias Resistor . . . . .	240	ohms	
Heater Current . . . . .	MIN	AVE	MAX
Heater Current . . . . .	90	100	110
Plate Current . . . . .	5.9	8.2	10.0
Transconductance . . . . .	4500	5500	6500
Transconductance, End of Life Point . . . . .	3700		
I <sub>hk</sub> at E <sub>hk</sub> = $\pm$ 100 volts . . . . .			20
Grid Current . . . . .			—.05
Cutoff Plate Current at E <sub>ci</sub> = — 10 volts . . . . .			75
Vibration Output . . . . .	5		mv
Measured at 2.5 g and 25 cps with both sections in parallel. E <sub>f</sub> = 40.0 v, E <sub>b</sub> = 150 v, E <sub>ci</sub> = — 3 v, r <sub>p</sub> = 2000 ohms.			

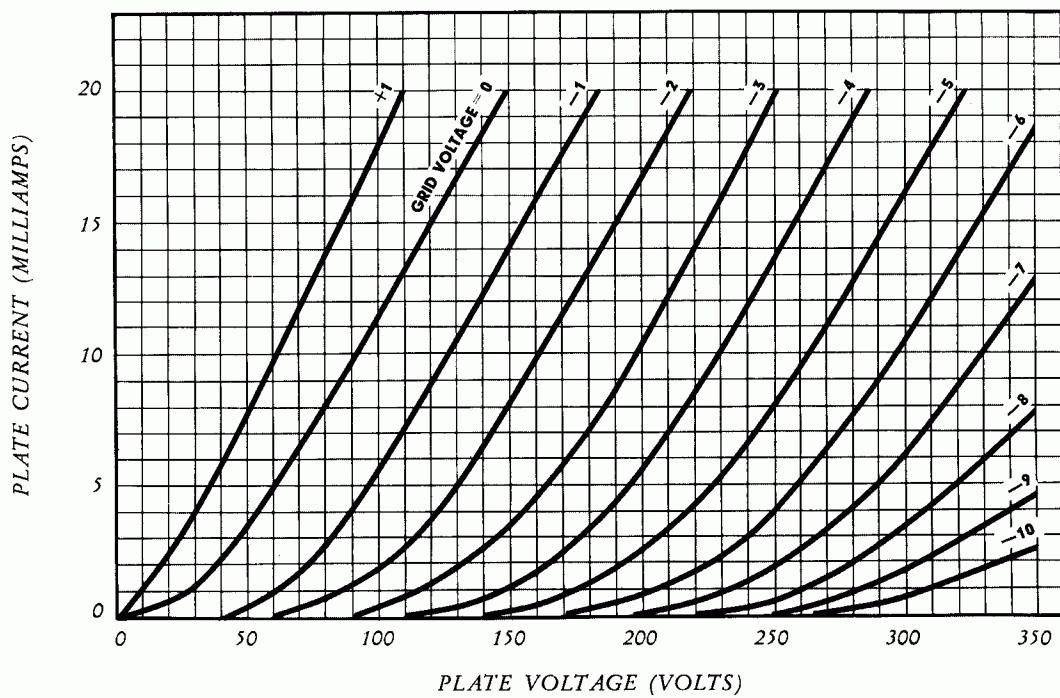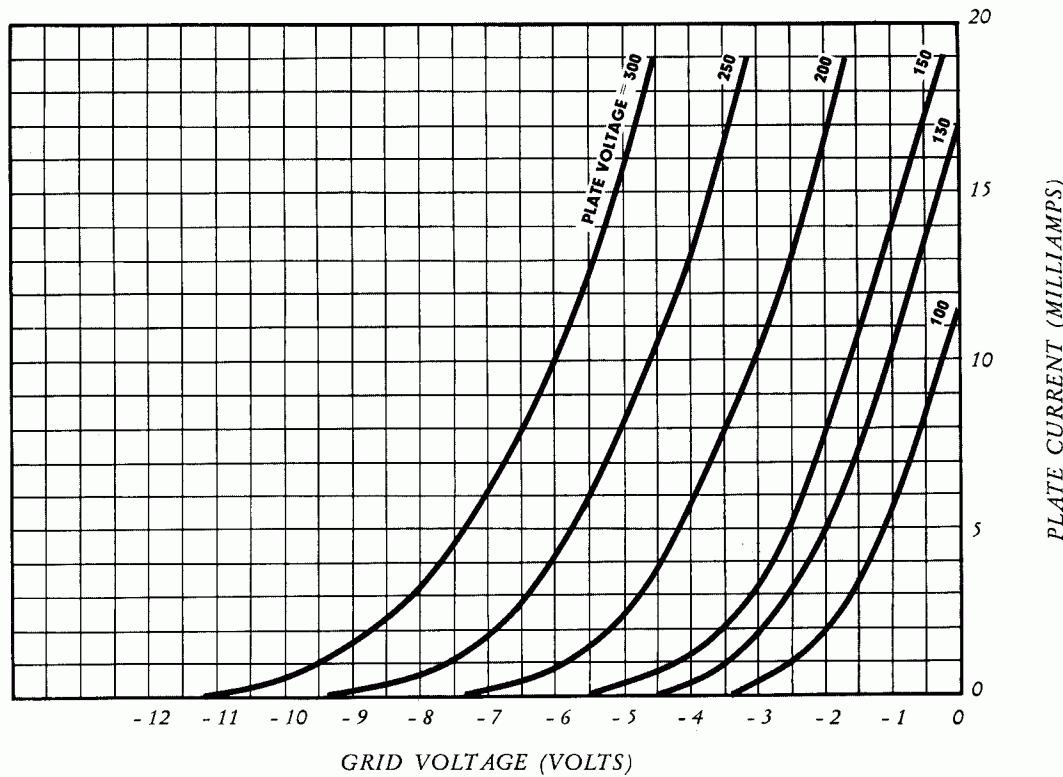**AVERAGE CHARACTERISTICS**


# 407A TWIN TRIODE

**Ericsson**  
LM

## AVERAGE CHARACTERISTICS

