

# DESCRIPTION AND RATING

## TRANSMITTING TUBE GL-6017

The GL-6017 is a three-electrode transmitting tube with a metal-and-ceramic envelope for use as a power amplifier or oscillator in Class B or Class C service for industrial or communications applications. This tube is designed particularly for grounded-grid operation.

The GL-6017 has an indirectly heated thoria-coated cathode, a plate dissipation of 1000 watts, and is forced-air cooled. Maximum ratings apply at frequencies up to 400 megacycles.

In Class C grounded-grid service this tube can deliver a peak power output of 1100 watts. In grounded-filament service the output is 900 watts.

The GL-6017 provides a compact triode for those applications which require the same power ratings as the four-electrode types GL-6019 and GL-6183, but where the higher frequencies at which these tubes are rated are not required.

### TECHNICAL INFORMATION

#### GENERAL

##### Electrical Data

|  | Minimum | Bogey | Maximum |         |
|--|---------|-------|---------|---------|
| Heater Voltage*                                      | ---     | 10    | 10.5    | Volts   |
| Heater Current at Bogey Voltage                      | ---     | 17    | ---     | Amperes |
| Heater Starting Current                              | ---     | ---   | 26      | Amperes |
| Heater Cold Resistance                               | ---     | 0.049 | ---     | Ohms    |
| Cathode Heating Time                                 | 1       | ---   | ---     | Minutes |
| Amplification Factor, $I_b = 100$ ma, $E_b = 1750$ v | ---     | 40    | ---     |         |
| Peak Cathode Current†                                | ---     | ---   | 5.5     | Amperes |
| Direct Interelectrode Capacitances                   |         |       |         |         |
| Grid-plate   | ---     | 9     | ---     | uuf     |
| Grid-cathode   | ---     | 11    | ---     | uuf     |
| Plate Cathode‡                                       | ---     | 0.05  | ---     | uuf     |

##### Mechanical Data

Mounting Position - Vertical

##### Air Flow

Through Radiator

|                                  |      |     |     |
|----------------------------------|------|-----|-----|
| Plate Dissipation - Watts        | 1000 | 800 | 600 |
| Air Flow - Cubic Feet per Minute | 55   | 40  | 30  |
| Static Pressure - Inches Water   | 1.5  | 0.9 | 0.6 |

##### To Seals

|                                |         |        |
|--------------------------------|---------|--------|
| Incoming Air Temperature       | 45 Max  | C      |
| Glass Temperature, heater seal | 150 Max | C      |
| Ceramic-seal Temperature       | 200 Max | C      |
| Net Weight, approximate        | 3.5     | Pounds |

Forced-air cooling of the filament terminals must be provided to limit the temperature of the glass seal to 150 C. Air cooling to be applied before and during the application of any voltages. Air cooling of the anode may be discontinued with removal of all voltages. Air flow on heater-to-cathode seal must be maintained for one minute after removal of heater voltage.

MAXIMUM RATINGS AND TYPICAL OPERATING CONDITIONS

Radio-frequency Power Amplifier - Class B

Carrier conditions per tube for use with a maximum modulation factor of 1.0

Maximum Ratings, Absolute Values

|                   |          |              |
|-------------------|----------|--------------|
| D-c Plate Voltage | 3000 Max | Volts        |
| D-c Plate Current | 580 Max  | Milliamperes |
| Plate Input       | 1500 Max | Watts        |
| Plate Dissipation | 1000 Max | Watts        |

Typical Operation - Grounded-filament Circuit

|   |      |              |
|---|------|--------------|
| D-c Plate Voltage                       | 2500 | Volts        |
| D-c Grid Voltage                        | -50  | Volts        |
| Peak R-f Plate Voltage                  | 1000 | Volts        |
| Peak R-f Grid Voltage                   | 150  | Volts        |
| D-c Plate Current                       | 570  | Milliamperes |
| D-c Grid Current                        | 75   | Milliamperes |
| Driving Power, approximate <sup>π</sup> | 78   | Watts        |
| Power Output, approximate               | 450  | Watts        |

Typical Operation - Grounded-grid Circuit

|  |      |              |
|--|------|--------------|
| D-c Plate Voltage                        | 2500 | Volts        |
| D-c Grid Voltage                         | -50  | Volts        |
| Peak R-f Plate Voltage                   | 1000 | Volts        |
| Peak R-f Grid Voltage                    | 150  | Volts        |
| D-c Plate Current                        | 570  | Milliamperes |
| D-c Grid Current                         | 75   | Milliamperes |
| Driving Power, approximate <sup>πΔ</sup> | 240  | Watts        |
| Power Output <sup>Δ</sup>                | 515  | Watts        |

Radio-frequency Power Amplifier - Class B Television Service

Synchronizing-level conditions per tube unless otherwise specified

Maximum Ratings, Absolute Values

|                   |          |        |
|-------------------|----------|--------|
| D-c Plate Voltage | 3000 Max | Volts  |
| D-c Plate Current | 0.7 Max  | Ampere |
| Plate Input       | 2000 Max | Watts  |
| Plate Dissipation | 1000 Max | Watts  |
| Grid Dissipation  | 50 Max   | Watts  |

Typical Operation - Grounded-grid Circuit up to 220 Megacycles

Bandwidth 6 Megacycles

|  |      |              |
|--|------|--------------|
| D-c Plate Voltage                                | 2000 | Volts        |
| D-c Grid Voltage                                 | -35  | Volts        |
| Peak R-f Plate Voltage                           |      |              |
| Synchronizing Level                              | 1000 | Volts        |
| Pedestal Level                                   | 750  | Volts        |
| Peak R-f Driving Voltage                         |      |              |
| Synchronizing Level                              | 180  | Volts        |
| Pedestal Level                                   | 135  | Volts        |
| D-c Plate Current                                |      |              |
| Synchronizing Level                              | 700  | Milliamperes |
| Pedestal Level                                   | 525  | Milliamperes |
| D-c Grid Current                                 |      |              |
| Synchronizing Level                              | 150  | Milliamperes |
| Pedestal Level                                   | 80   | Milliamperes |
| Driving Power at Tube <sup>Δ</sup> , approximate |      |              |
| Synchronizing Level                              | 130  | Watts        |
| Pedestal Level                                   | 70   | Watts        |
| Power Output <sup>Δ</sup> , approximate          |      |              |
| Synchronizing Level                              | 660  | Watts        |
| Pedestal Level                                   | 375  | Watts        |

Plate-modulated Radio-frequency Power Amplifier - Class C Telephony

Carrier conditions per tube for use with a maximum modulation factor of 1.0

Maximum Ratings, Absolute Values

|                   |          |              |
|-------------------|----------|--------------|
| D-c Plate Voltage | 2400 Max | Volts        |
| D-c Grid Voltage  | -400 Max | Volts        |
| D-c Plate Current | 580 Max  | Milliamperes |
| D-c Grid Current  | 150 Max  | Milliamperes |
| Plate Input       | 1340 Max | Watts        |
| Plate Dissipation | 670 Max  | Watts        |

Typical Operation - Grounded-filament Circuit

|                               |      |      |              |
|-------------------------------|------|------|--------------|
| D-c Plate Voltage             | 2400 | 2000 | Volts        |
| D-c Grid Voltage              | -200 | -200 | Volts        |
| Peak R-f Plate Voltage        | 1800 | 1500 | Volts        |
| Peak R-f Grid Voltage         | 350  | 330  | Volts        |
| D-c Plate Current             | 425  | 350  | Milliamperes |
| D-c Grid Current, approximate | 125  | 110  | Milliamperes |
| Driving Power, approximate    | 50   | 35   | Watts        |
| Power Output, approximate     | 675  | 470  | Watts        |

Typical Operation - Grounded-grid Circuit

|  |      |      |              |
|--|------|------|--------------|
| D-c Plate Voltage                      | 2400 | 2000 | Volts        |
| D-c Grid Voltage                       | -200 | -200 | Volts        |
| Peak R-f Plate Voltage                 | 1800 | 1500 | Volts        |
| Peak R-f Grid Voltage                  | 350  | 330  | Volts        |
| D-c Plate Current                      | 425  | 350  | Milliamperes |
| D-c Grid Current, approximate          | 125  | 110  | Milliamperes |
| Driving Power $\diamond$ , approximate | 175  | 137  | Watts        |
| Power Output $\Delta$ , approximate    | 800  | 575  | Watts        |

Class C Radio-frequency Power Amplifier and Oscillator - Class C Telegraphy

Key-down conditions per tube without amplitude modulation $\S$

Maximum Ratings, Absolute Values

|                   |          |              |
|-------------------|----------|--------------|
| D-c Plate Voltage | 3000 Max | Volts        |
| D-c Grid Voltage  | -500 Max | Volts        |
| D-c Plate Current | 700 Max  | Milliamperes |
| D-c Grid Current  | 150 Max  | Milliamperes |
| Plate Input       | 2000 Max | Watts        |
| Plate Dissipation | 1000 Max | Watts        |

Typical Operation, Grounded-filament Circuit


|                               |      |      |              |
|-------------------------------|------|------|--------------|
| D-c Plate Voltage             | 2500 | 2800 | Volts        |
| D-c Grid Voltage              | -200 | -250 | Volts        |
| Peak R-f Plate Voltage        | 1700 | 1800 | Volts        |
| Peak R-f Grid Voltage         | 325  | 425  | Volts        |
| D-c Plate Current             | 380  | 600  | Milliamperes |
| D-c Grid Current, approximate | 95   | 110  | Milliamperes |
| Driving Power, approximate    | 28   | 50   | Watts        |
| Power Output, approximate     | 375  | 900  | Watts        |

Typical Operation, Grounded-grid Circuit

|                               |      |      |              |
|-------------------------------|------|------|--------------|
| D-c Plate Voltage             | 2500 | 2800 | Volts        |
| D-c Grid Voltage              | -200 | -250 | Volts        |
| Peak R-f Plate Voltage        | 1700 | 1800 | Volts        |
| Peak R-f Grid Voltage         | 325  | 425  | Volts        |
| D-c Plate Current             | 380  | 600  | Milliamperes |
| D-c Grid Current, approximate | 95   | 110  | Milliamperes |
| Driving Power $\Delta$        | 150  | 250  | Watts        |
| Power Output $\Delta$         | 500  | 1100 | Watts        |

\* Heater and cathode life can be conserved by operating the heater at the lowest voltage which will give the desired power output. The proper operating value may be found by reducing the heater voltage with normal modulation applied until a reduction in output is observed. The heater voltage must then be increased by an amount equivalent to the maximum percentage regulation of the heater voltage supply.

- † Represents maximum useable cathode current (Plate current plus grid current for any condition of operation).
- \* Measured with a 6-inch outside diameter and 1 1/2-inch inside diameter flat shield connected to the grid terminal and grounded.
- π At crest of audio-frequency cycle with modulation factor of 1.
- Δ Includes power transferred from driver stage.
- ◇ The carrier of the driver modulated 100 percent.
- § Modulation essentially negative may be used if the positive peak of the audio-frequency envelope does not exceed 115 percent of the carrier condition.

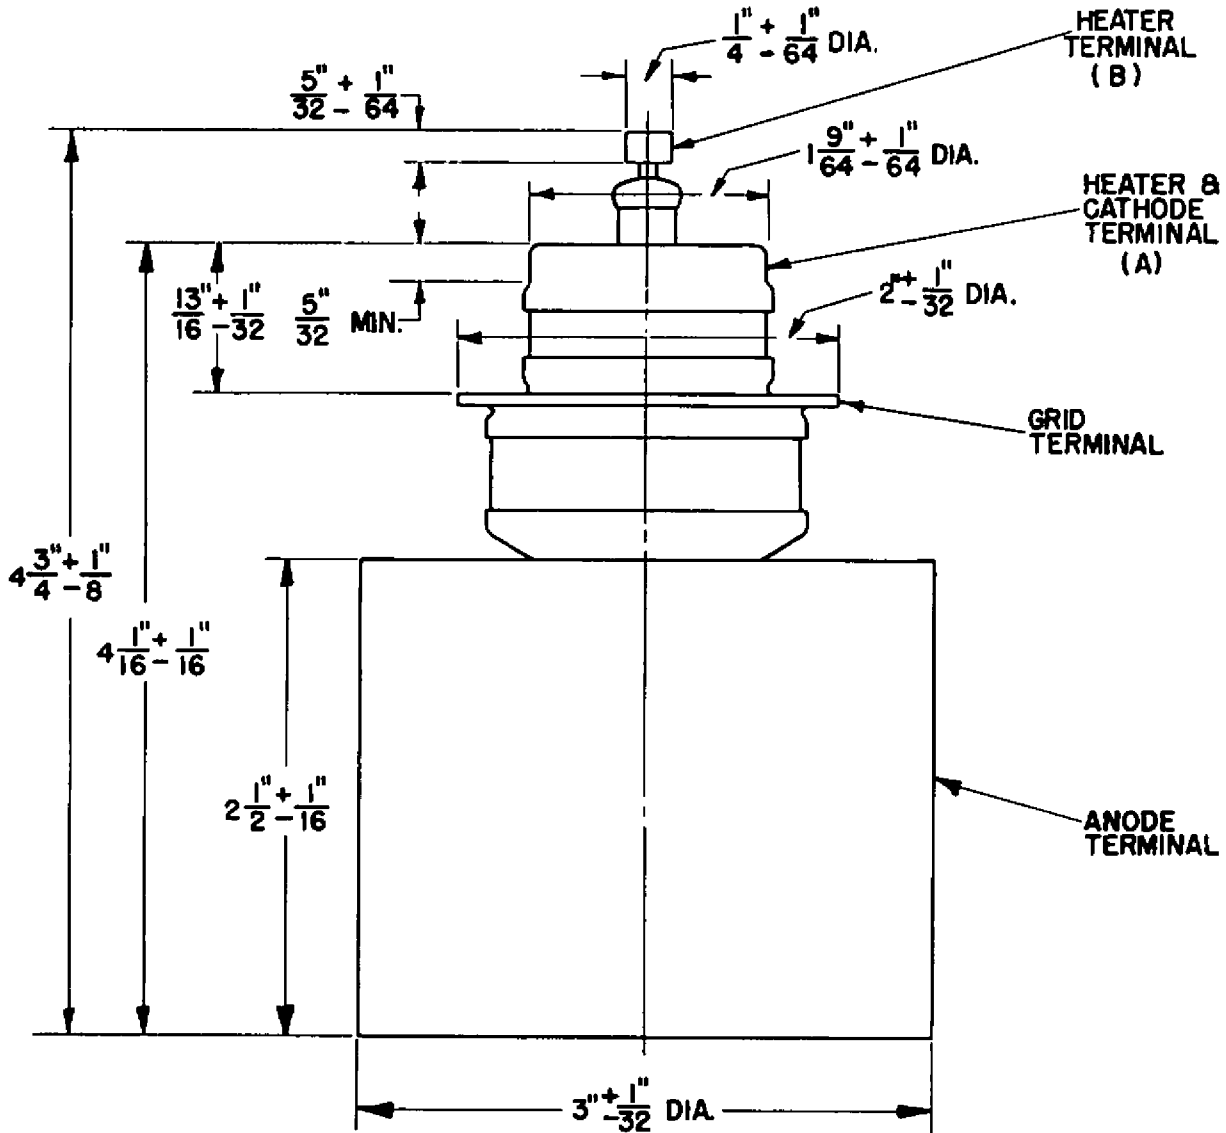


**NOTES:**

- (A) MAXIMUM ECCENTRICITY 0.050" WITH RESPECT TO THE AXIS OF RADIATOR.
- (B) MAXIMUM ECCENTRICITY 0.040" WITH RESPECT TO CENTERLINE DETERMINED BY THE CENTERS OF BOTTOM OF RADIATOR AND HEATER TERMINAL (A).

N20722AZ

May 20, 1952


GL-6017  
Outline

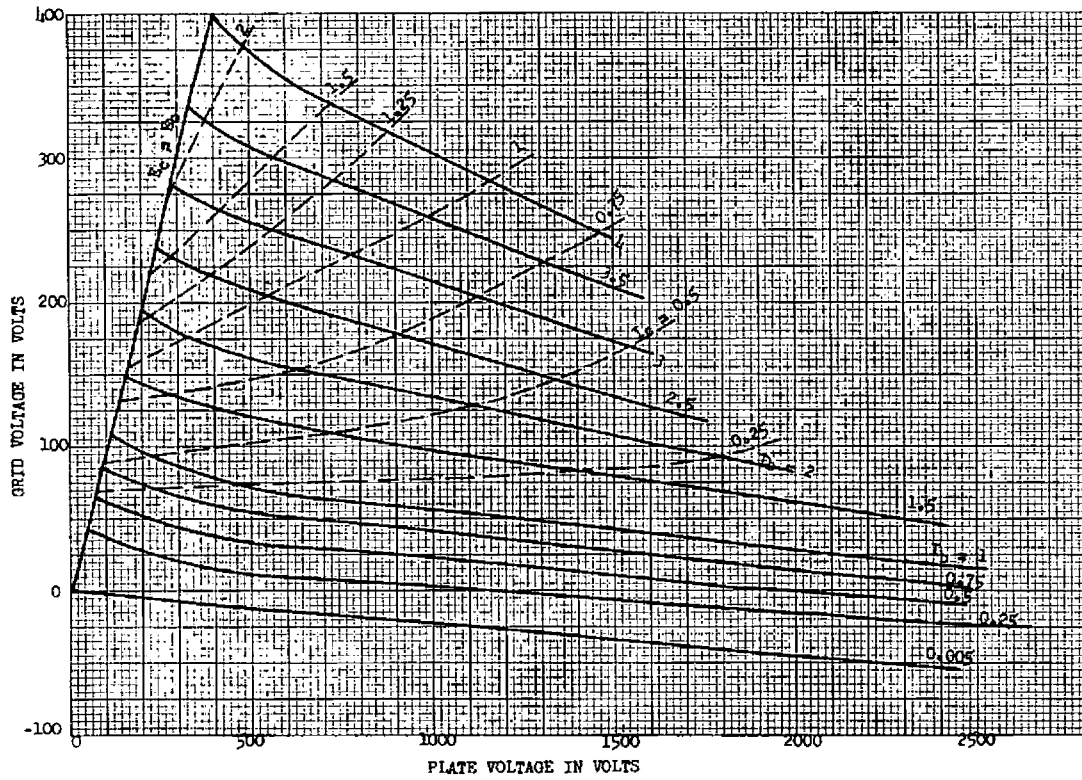

K-69087-72A410

May 26, 1952


GL-6017  
 Constant-current Characteristics  
 $E_f = 10$  Volts A-c

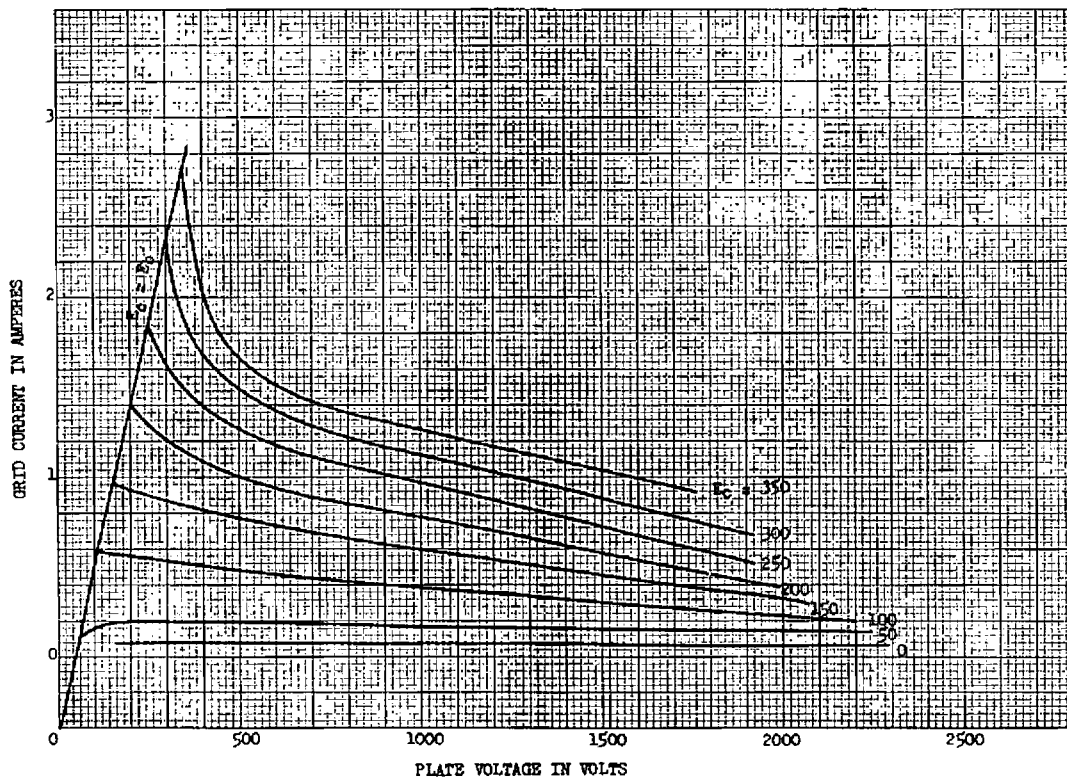

K-69087-72A411

May 26, 1952

GL-6017  
 Average Grid-plate Transfer Characteristics  
 $E_f = 10$  Volts A-c

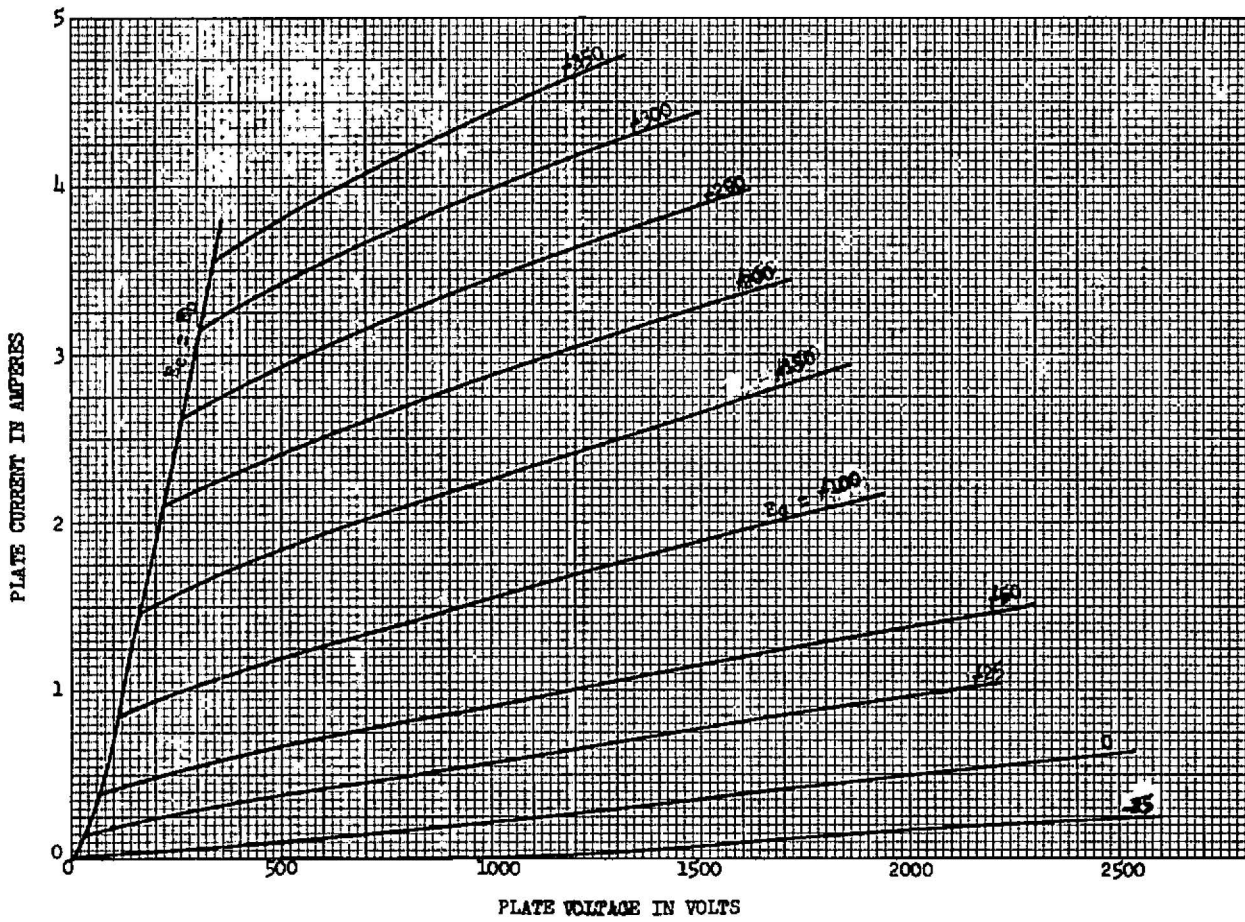

K-69087-72A412

May 26, 1952

GL-6017  
 Average Plate Characteristics  
 $E_f = 10$  Volts A-c

**GENERAL**  **ELECTRIC**  
 TUBE DEPARTMENT  
 SCHENECTADY, NEW YORK