

JETEC TYPE DESIGNATION REGISTRATION FORM

ATR TUBES

Manufacturer's Designation: BL-55
JETEC Designation: 6630
Manufacture: Bomac Laboratories, Inc.
Beverly, Massachusetts

March 7, 1957

GENERAL CHARACTERISTICS

The 6630 is a broad band ATR tube designed to effectively decouple the transmitter from a common transmitting and receiving antenna during a non-transmitting period. It is designed to operate over a frequency range from 9000 to 9600 megacycles.

ELECTRICAL DATA - TYPICAL VALUES

Center Frequency	9375 Mc/sec.
Operational Band at VSWR 12 minimum	8960 to 9640 Mc.
Load Q (max.)	8.0
Transmitter Peak Power (max.)	250 kw
Transmitter Peak Power (min.)	5 kw
Equivalent Conductance (max.)	0.1
Tuning Susceptance (max.)	±0.06
Arc Power Loss (max.)	0.8 db
F=9375; po=4.0 kw; tp=0.5 μsec; prr=1000 pps	
Recovery Time (max.)	8.0 μs
F=9375 Mc; po=50 kw; tp=1.0 μs; prr=1000 pps.	

MECHANICAL DATA - GENERAL


Mounting Position	Any
Weight, approximately	1.2 ozs.

ABSOLUTE MAXIMUM RATINGS

Transmitter Peak Power	250 kw
Transmitter Average Power	250 W

OUTLINE DRAWING

Outline as per attached drawing dated 12-8-54
Mounting Seat as per attached drawing dated 10-1-54

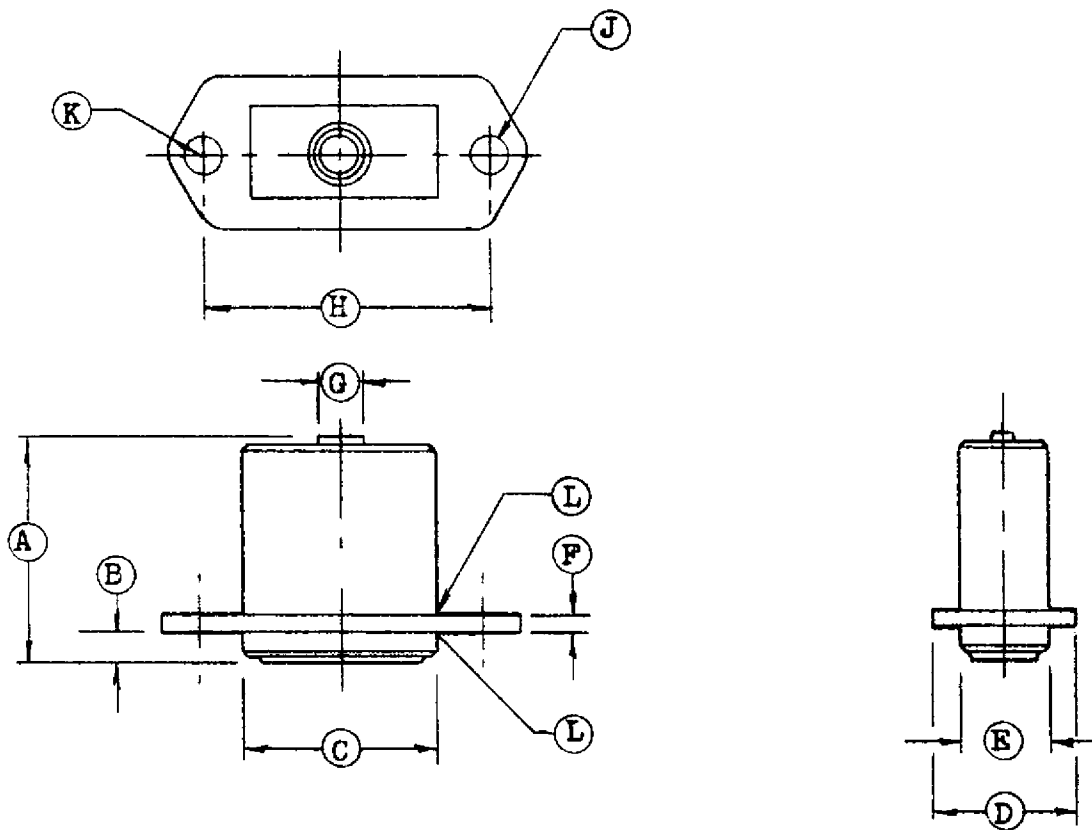




Ref.	Dimension
A*	1.200 Max.
B	0.145
C	1.000
D*	0.781
E	0.500
F**	0.093
G**	1/4 Max.
H*	1.500 ± .003
J	#18 (.1695) Dr. 2 Holes
K**	3/16 Rad.
L**	0.030 Rad. Max.

SPECIFICATION SHEET


Outline 6304/BL-43
6629/BL-54, 6630/BL-55,

BOMAC LABORATORIES INC.
SALEM ROAD
BEVERLY, MASSACHUSETTS

12-8-54 clr

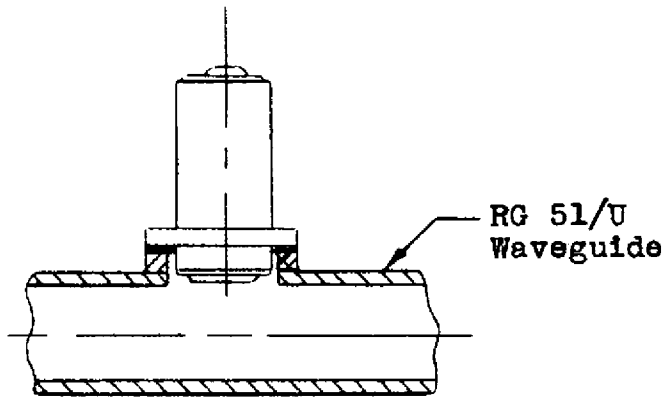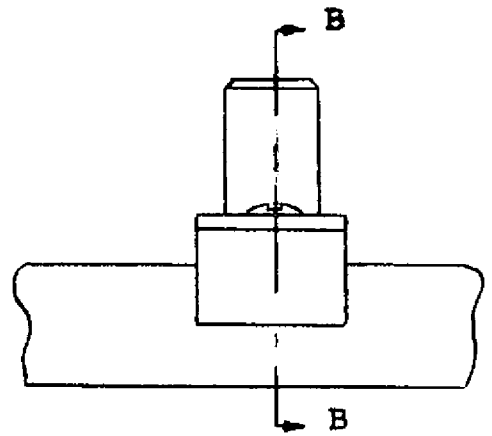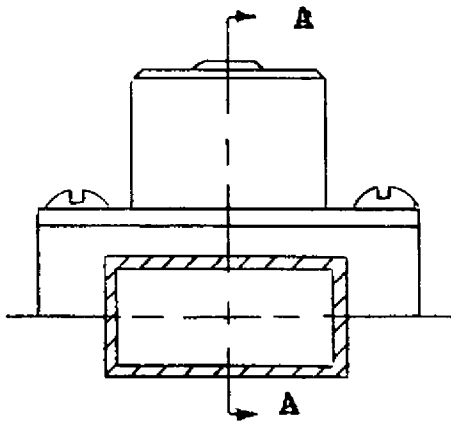

Section A-A of seat
showing tube in position

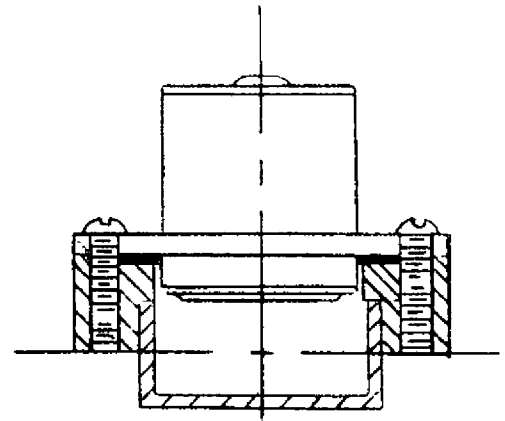

Section B-B of seat
showing tube in
position

NOTES

1. Design of holder optional
2. Tube held firmly in place by screw clamp
3. Bottom of tube is to be approx. flush (± 0.004) with inside surface of waveguide.

SPECIFICATION SHEET		BOMAC LABORATORIES INC. SALEM ROAD BEVERLY, MASSACHUSETTS
GS-2E-1.10.30.09	TUBE MOUNTING 6629/BL-54, BL-55/6630	
		10-1-54 R.R.