

engineering data service


10NP11


CHARACTERISTICS

CHARACTERISTICS	
GENERAL DATA	
Focusing Method	
ELECTRICAL DATA	
Heater Voltage	
Direct Interelectrode Capacitances (approx.)	
Cathode to All Other Electrodes 5 µµf	
Grid to All Other Electrodes 6 $\mu\mu$ f	
External Conductive Coating to Anode 1500 μμf Max. 500 μμf Min.	
MECHANICAL DATA	
Minimum Useful Screen Diameter	
Bulb Contact (Recessed Small Cavity Cap)	
Base (Small Shell Duodecal 5-Pin)	
Basing	
Bulb Contact Aligns with Vacant Pin Position No. 3	
RATINGS MAXIMUM RATINGS (Design Center Values)	
Anode Voltage	
Grid Voltage Negative Bias Value	
Positive Bias Value	
Positive Peak Value 2 Volts	
Peak Heater-Cathode Voltage	
Heater Negative with Respect to Cathode During Warm-Up Period Not to Exceed	
15 Seconds	
After Equipment Warm-Up Period 150 Volts	
Heater Positive with Respect to Cathode 150 Volts	
RECOMMENDED OPERATING CONDITIONS	
Anode Voltage	
Grid Voltage ¹ 65 to -125 Volts dc	
Focusing Coil Current (approx.) ²	
CIRCUIT VALUES	
Grid No. 1 Circuit Resistance 1.5 Megohms Ma	a v
	uA.

QUICK REFERENCE DATA

Special Purpose Tube 10" Video Recording Tube Round Glass Type Magnetic Deflection Magnetic Focus Gray Filter Glass Aluminized Screen





SYLVANIA ELECTRIC PRODUCTS INC.

TELEVISION PICTURE TUBE DIVISION SENECA FALLS, NEW YORK

Prepared and Released By The TECHNICAL PUBLICATIONS SECTION EMPORIUM, PENNSYLVANIA

JULY, 1954

NOTES:

- 1. Visual extinction of undeflected focused spot.
- 2. For JETEC focusing 109 or equivalent, three and one quarter inches from reference line.

10NP11

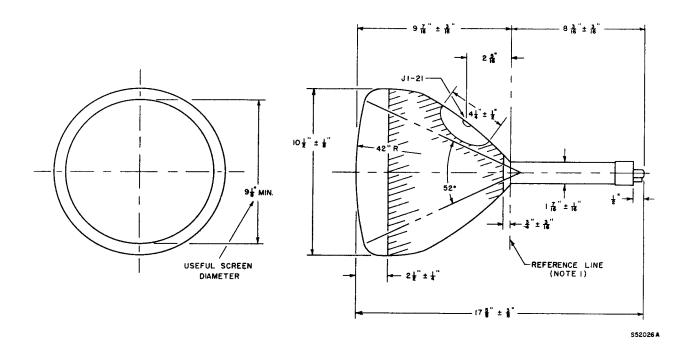


DIAGRAM NOTES:

1. Reference line is determined by position where JETEC reference line gauge No. 112 will rest on the bulb cone.

WARNING:

X-ray radiation shielding may be necessary to protect against possible danger of personal injury from prolonged exposure at close range if this tube is operated at higher than the manufacturer's Maximum Rated Anode Voltage or 16,000 volts, whichever is less.