

## TUNG-SOL

## CATHODE RAY

THE 16DP4 AND 16DP4A ARE DIRECT-VIEW PICTURE TUBES DESIGNED FOR USE IN TELEVISION APPLICATIONS. THEY ARE IDENTICAL WITH THE FOLLOWING *EXCEPTION*:

*16DP4 - CLEAR GLASS FACEPLATE*

*16DP4A - GREY FILTER FACEPLATE*

THEIR COMMON FEATURES INCLUDE:

UNIPOTENTIAL CATHODE	ROUND GLASS CONSTRUCTION
MAGNETIC FOCUS & DEFLECTION	EXTERNAL DOUBLE FIELD ION TRAP
10 1/8" X 14 1/2" RASTER SIZE	

## ELECTRICAL DATA

FOCUSING METHOD		MAGNETIC
DEFLECTING METHOD		MAGNETIC
DEFLECTION ANGLE (APPROX.)	60	DEGREES
DIRECT INTERELECTRODE CAPACITANCES (APPROX.):		
CATHODE TO ALL OTHER ELECTRODES	5.0	$\mu\mu\text{f}$
GRID #1 TO ALL OTHER ELECTRODES	6.5	$\mu\mu\text{f}$

## OPTICAL DATA


PHOSPHOR NUMBER		NO. 4
FLUORESCENT COLOR		WHITE
PHOSPHORESCENT COLOR		WHITE
PERSISTENCE		MEDIUM
FACEPLATE LIGHT TRANSMISSION AT CENTER (APPROX.)	16DP4A 70	PERCENT

## MECHANICAL DATA

OVERALL LENGTH	20 3/4 $\pm$ 1/4	INCHES
GREATEST DIAMETER OF BULB	15 7/8 $\pm$ 1/8	INCHES
MINIMUM USEFUL SCREEN DIAMETER	14 1/2	INCHES
BULB CONTACT	RECESSED SMALL CAVITY CAP	J1-21
BASE	SMALL SHELL DUODECAL 5 PIN	B5-57
BASING		120
BULB CONTACT ALIGNMENT		
J1-21 CONTACT ALIGNS WITH PIN POSITION #3 $\pm$ 10 DEGREES		

## PIN CONNECTIONS

PIN 1 - HEATER  
 PIN 2 - GRID NO. 1  
 PIN 10 - GRID NO. 2



PIN 11 - CATHODE  
 PIN 12 - HEATER  
 ANODE CAP

BOTTOM VIEW

CONTINUED ON FOLLOWING PAGE

## TUNG-SOL

CONTINUED FROM PRECEDING PAGE

RATINGS  
DESIGN CENTER VALUES

HEATER VOLTAGE	6.3	VOLTS
HEATER CURRENT	0.6	AMP.
MAXIMUM DC ANODE VOLTAGE	15 000	VOLTS
MAXIMUM DC GRID #2 VOLTAGE	410	VOLTS
MAXIMUM GRID #1 VOLTAGE;		
DC NEGATIVE-BIAS VALUE	125	VOLTS
DC POSITIVE-BIAS VALUE	0	VOLTS
POSITIVE-PEAK VALUE	2	VOLTS
MAXIMUM DC PEAK HEATER-CATHODE VOLTAGE:		
HEATER NEGATIVE WITH RESPECT TO CATHODE		
DURING WARM-UP PERIOD NOT TO EXCEED 15 SECONDS	410	VOLTS
AFTER EQUIPMENT WARM-UP PERIOD	125	VOLTS
HEATER POSITIVE WITH RESPECT TO CATHODE	125	VOLTS

## TYPICAL OPERATING CONDITIONS AND CHARACTERISTICS

DC ANODE VOLTAGE <sup>A</sup>	12 000	VOLTS
DC GRID #2 VOLTAGE	250	VOLTS
DC GRID #1 VOLTAGE <sup>B</sup>	-27 to -63	VOLTS
DC FOCUSING COIL CURRENT (APPROX.) <sup>C</sup>	115 ± 15%	MA.
DC ION TRAP CURRENT STANDARD COIL #108 (APPROX.)	109	MA.

<sup>A</sup> BRILLIANCE AND DEFINITION DECREASE WITH DECREASING ANODE VOLTAGE. IN GENERAL, ANODE VOLTAGE SHOULD NOT BE LESS THAN 9,000 VOLTS.


<sup>B</sup> VISUAL EXTINCTION OF UNDEFLECTED FOCUSED SPOT.

<sup>C</sup> FOR STANDARD FOCUS COIL #109, OR EQUIVALENT, WITH THE COMBINED GRID #1 BIAS VOLTAGE AND VIDEO SIGNAL VOLTAGE ADJUSTED TO PRODUCE A HIGHLIGHT BRIGHTNESS OF 20 FOOT LAMBERTS ON A 10 1/4" BY 14 1/2" PICTURE SIZE. DISTANCE FROM REFERENCE LINE TO CENTER OF AIR GAP ON FOCUS COIL SHALL BE 3.25 INCHES.

## CIRCUIT VALUES

MAXIMUM GRID #1 CIRCUIT RESISTANCE	1.5	MEG OHMS
------------------------------------	-----	----------

TUNG-SOL

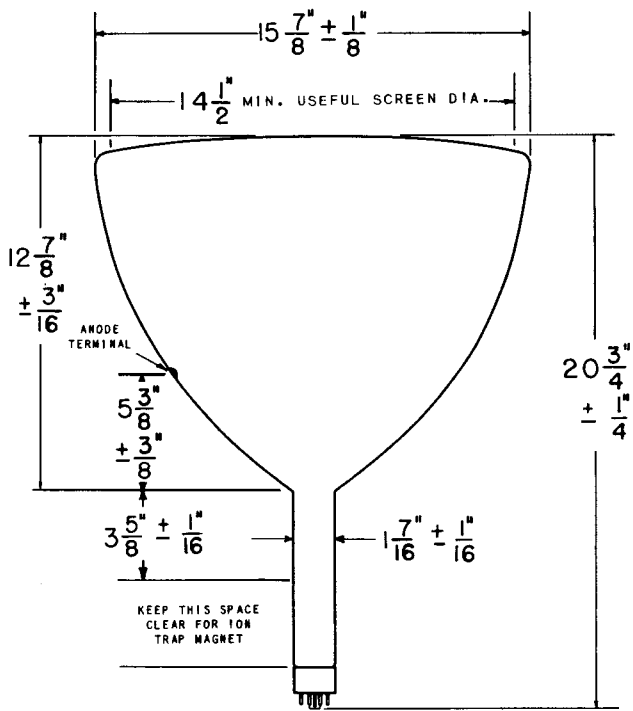

PRINTED IN U. S. A.