

TUNG-SOL

CATHODE RAY

THE 20LP4 IS A DIRECT-VIEW PICTURE TUBE DESIGNED FOR USE IN TELEVISION APPLICATIONS. ITS FEATURES INCLUDE:

MAGNETIC DEFLECTION	UNIPOTENTIAL CATHODE
GREY FILTER FACEPLATE	17" X 19 1/4" RASTER SIZE
RECTANGULAR GLASS CONSTRUCTION	EXTERNAL CONDUCTIVE COATING
LOW VOLTAGE ELECTROSTATIC FOCUS.	EXTERNAL SINGLE FIELD ION TRAP

ELECTRICAL DATA

FOCUSING METHOD		ELECTROSTATIC
DEFLECTING METHOD		MAGNETIC
DEFLECTION ANGLE (APPROX.):		
HORIZONTAL	66	DEGREES
DIAGONAL	70	DEGREES
DIRECT INTERELECTRODE CAPACITANCES (APPROX.):		
CATHODE TO ALL OTHER ELECTRODES	5	$\mu\mu\text{f}$
GRID #1 TO ALL OTHER ELECTRODES	6	$\mu\mu\text{f}$
MAXIMUM EXTERNAL CONDUCTIVE COATING TO ANODE	1 500	$\mu\mu\text{f}$
MINIMUM EXTERNAL CONDUCTIVE COATING TO ANODE	750	$\mu\mu\text{f}$

OPTICAL DATA


PHOSPHOR NUMBER	SULFIDE TYPE	NO. 4
FLUORESCENT COLOR		WHITE
PHOSPHORESCENT COLOR		WHITE
PERSISTENCE		SHORT
FACEPLATE LIGHT TRANSMISSION, AT CENTER (APPROX.)	64 TO 72.5	PERCENT

MECHANICAL DATA

OVERALL LENGTH	21 3/4 \pm 3/8	INCHES
GREATEST DIMENSIONS OF BULB:		
DIAGONAL	20 3/32 \pm 1/8	INCHES
WIDTH	18 11/16 \pm 1/8	INCHES
HEIGHT	14 15/16 \pm 1/8	INCHES
MINIMUM USEFUL SCREEN DIMENSIONS:		
WIDTH	17	INCHES
HEIGHT	13 1/4	INCHES
BULB CONTACT	RECESSED SMALL CAVITY CAP	J1-21
BASE	SMALL SHELL DUODECAL 6 PIN	B6-63
BASING		12L
BULB CONTACT ALIGNMENT		
J1-21 CONTACT ALIGNS WITH PIN POSITION #6 \pm 30 DEGREES		

PIN CONNECTIONS

PIN 1 - HEATER
 PIN 2 - GRID NO. 1
 PIN 6 - GRID NO. 4
 PIN 10 - GRID NO. 2



PIN 11 - CATHODE
 PIN 12 - HEATER
 ANODE CAP

BOTTOM VIEW

CONTINUED ON FOLLOWING PAGE

TUNG-SOL

CONTINUED FROM PRECEDING PAGE

RATINGS
DESIGN CENTER VALUES

HEATER VOLTAGE	6.3	VOLTS
HEATER CURRENT	0.6	AMP.
MAXIMUM DC GRID #2 VOLTAGE (WITH PROTECTIVE FACE VIEWING WINDOW) ^A	16 000	VOLTS
MAXIMUM DC GRID #4 VOLTAGE ^B	-1000 TO +2000	VOLTS
MAXIMUM DC GRID #2 VOLTAGE	500	VOLTS
MAXIMUM GRID #1 VOLTAGE:		
DC NEGATIVE-BIAS VALUE	125	VOLTS
DC POSITIVE-BIAS VALUE	0	VOLTS
POSITIVE-PEAK VALUE	2	VOLTS
MAXIMUM DC PEAK HEATER-CATHODE VOLTAGE:		
HEATER NEGATIVE WITH RESPECT TO CATHODE DURING WARM-UP PERIOD NOT TO EXCEED 15 SECONDS	410	VOLTS
AFTER EQUIPMENT WARM-UP PERIOD	180	VOLTS
HEATER POSITIVE WITH RESPECT TO CATHODE	180	

^A IF THIS TUBE IS OPERATED AT VOLTAGES IN EXCESS OF 16,000 VOLTS X-RAY RADIATION SHIELDING MAY BE NECESSARY TO AVERT POSSIBLE DANGER OF PERSONAL INJURY FROM PROLONGED EXPOSURE AT CLOSE RANGE.

^B THE FOCUSING ELECTRODE MAY BE MODULATED WITHIN THE MAXIMUM RANGE GIVEN WITHOUT DAMAGING THE TUBE.

TYPICAL OPERATING CONDITIONS AND CHARACTERISTICS



DC ANODE VOLTAGE	14 000	VOLTS
DC GRID #4 VOLTAGE	0	VOLTS
DC GRID #2 VOLTAGE	300	VOLTS
DC GRID #1 VOLTAGE ^C	-33 TO -77	VOLTS
ION TRAP FIELD INTENSITY (APPROX.)	35	GAUSSSES

^C VISUAL EXTINGUISHMENT OF UNDEFLECTED FOCUSED SPOT.

CIRCUIT VALUES

MAXIMUM GRID #1 CIRCUIT RESISTANCE	1.5	MEG OHMS
------------------------------------	-----	----------

TUNG-SOL

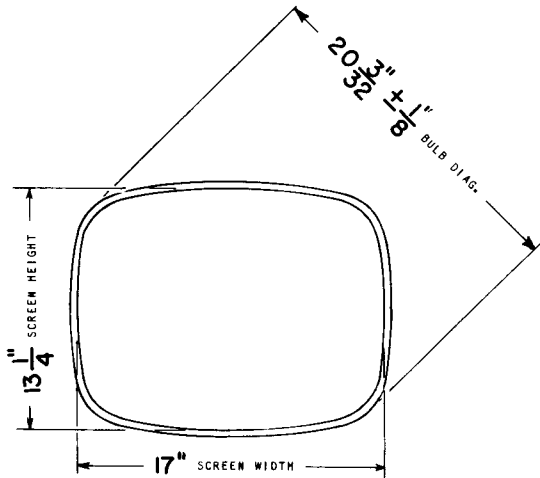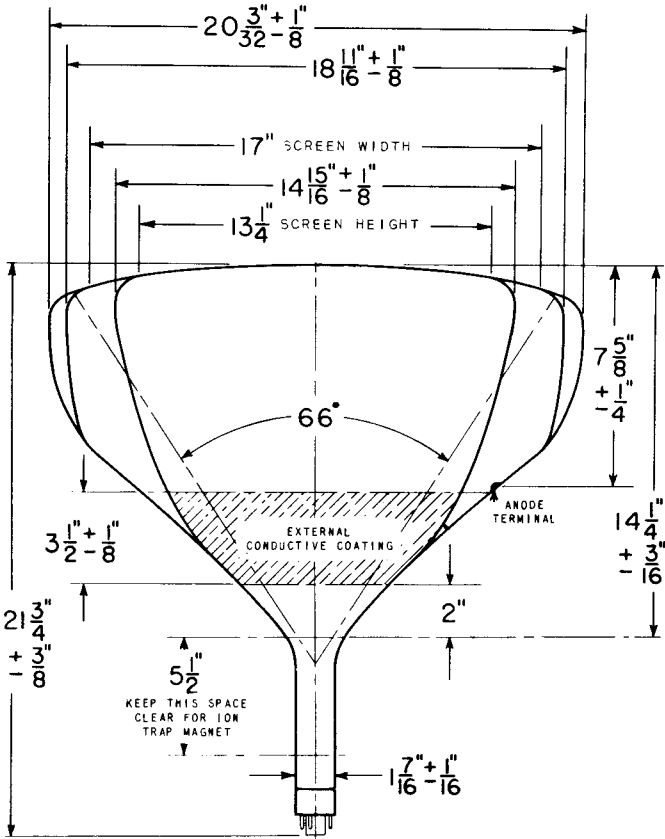

PRINTED IN U. S. A.