

CHARACTERISTICS

GENERAL DATA

Focusing Method	Magnetic
Deflecting Method	Magnetic
Deflection Angles (Approx.)	53 Degrees
Types*	Fluorescence Persistence
5DKP4	White Medium Short
5DKP11	Blue Medium Short
5DKP15	Green Visible: Short
	U.V.: Very Short
5DKP16	Bluish Purple (U.V.) Very Short
5DKP24	Green Short

*In addition to the types shown, the 5DKP- can be supplied with several other screen phosphors. All screens are aluminized.

ELECTRICAL DATA

Heater Voltage	6.3 Volts
Heater Current	0.6 ± 10 % Ampere
Direct Interelectrode Capacitances (Approx.)	
Cathode to All Other Electrodes	5 μmf
Grid No. 1 to All Other Electrodes	8 μmf

MECHANICAL DATA

Minimum Useful Screen Diameter	4 1/4 Inches
Nominal Overall Length	11 1/8 Inches
Bulb Contact (Recessed Small Ball Cap)	J1-22
Base (Medium Shell Octal 5-pin or 8-pin)	B8-11, B8-65 or B5-80
Basing	5AN
Bulb	J39 1/2 L

RATINGS

MAXIMUM RATINGS (Absolute Maximum Values)

Anode Voltage ¹	8800 Volts	dc
Grid No. 2 Voltage	770 Volts	dc
Grid No. 1 Voltage		
Negative Bias Value	180 Volts	dc
Positive Bias Value	0 Volts	dc
Positive Peak Value	2 Volts	
Peak Heater-Cathode Voltage		
Heater Negative with Respect to Cathode	180 Volts	
Heater Positive with Respect to Cathode	180 Volts	

TYPICAL OPERATING CONDITIONS



Anode Voltage ²	8000 Volts	dc
Grid No. 2 Voltage	250 Volts	dc
Grid No. 1 Voltage ³	-30 to -75 Volts	dc
Focusing Coil Current ⁴	136 ± 15 % Ma	dc
Spot Position (Undelected) ⁵	9 mm	
Line Width A ⁶16 mm	Max.

CIRCUIT VALUES

Grid No. 1 Circuit Resistance	1.5 Megohms Max.
---	------------------

QUICK REFERENCE DATA

5DKP4 —Monitor Tube
 5DKP11 —Photo Recorder
 5DKP15 }
 5DKP16 } —Flying Spot Scanners
 5DKP24 }
 5" Round Glass Type
 Aluminized Screen
 Magnetic Deflection
 Magnetic Focus
 High Resolution

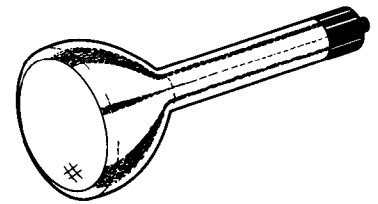

SYLVANIA ELECTRONIC TUBES

A Division of
 Sylvania Electric Products Inc.

PICTURE TUBE OPERATIONS
SENECA FALLS, NEW YORK

Prepared and Released By The
 TECHNICAL PUBLICATIONS SECTION
 EMPORIUM, PENNSYLVANIA

MARCH, 1962

PAGE 1 OF 2

File Under

SPECIAL AND GENERAL
 PURPOSE CATHODE RAY TUBES

NOTES:

1. The product of the anode voltage and the average anode current should be limited to 6 watts.
2. Brilliance and definition decrease with decreasing anode voltage. In general, the anode voltage should not be less than 6000 volts.
3. Visual extinction of undeflected focused spot.
4. For JEDEC focus coil No. 106 or equivalent, with the Grid No. 1 voltage adjusted to produce an accelerator current of 200 μ amps and with distance from reference line to center of air gap equal to $2\frac{3}{4}$ inches.
5. The center of the undeflected unfocused spot will fall within a circle of 9 mm radius centered on the tube face.
6. Measured in accordance with MIL-E-1 specification, at anode current of 200 μ a.

OUTLINE

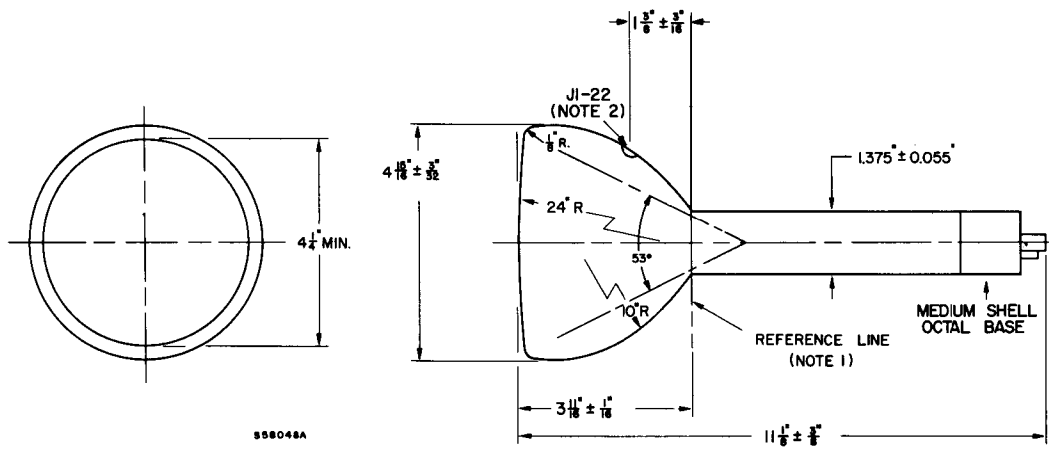


DIAGRAM NOTES:

1. Reference line is determined by position where JEDEC Gauge No. 124 (a cylinder $1.430'' + .003'' - .000''$ ID and 2'' long) will seat against cone of bulb.
2. The plane through the tube axis and Pin No. 5 may vary from the plane through the tube axis and anode terminal by an angular tolerance (measured about the tube axis) of 10° . Anode terminal is on same side of tube as Pin No. 5.